

WAAS CH 90405 W22A	APP CRS 219°	Rwy Idg 5000 TDZE 2880 Apt Elev 2885
--	------------------------	---


RNAV (GPS) RWY 22
LIBERAL MID-AMERICA RGNL (LBL)

RNP APCH - GPS.


- T** Circling NA east of Rwy 17-35. Baro-VNAV and VDP NA when using GUY
A altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA
below -20°C or above 54°C. When local altimeter setting not received, use
GUY altimeter setting and increase LPV DA to 3192 feet; Increase LNAV/VNAV
DA to 3280 feet and all visibilities ½ SM. Increase all MDAs 120 feet and LNAV
visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 4800 direct PERDE and hold.

AWOS-3PT 118.375	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

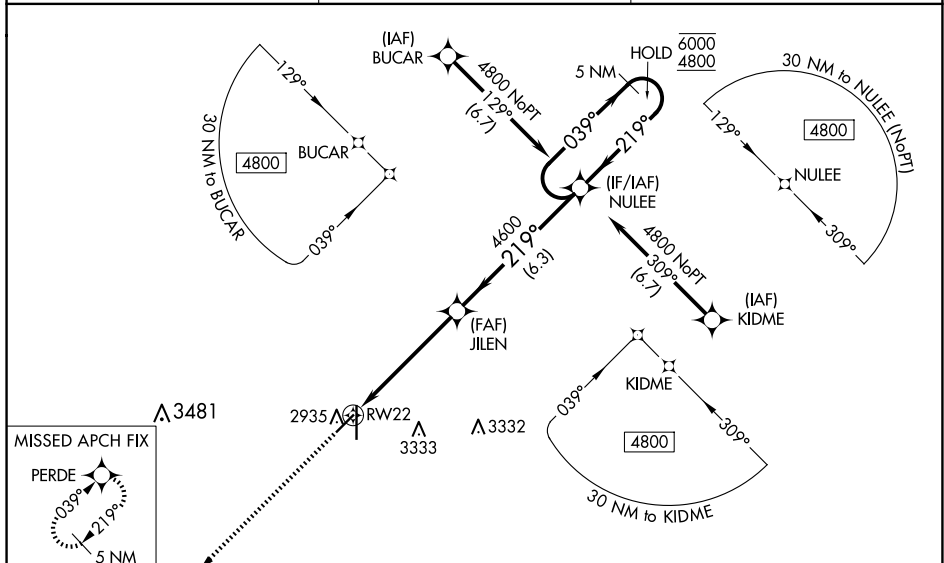

ELEV 2885	D	TDZE 2880
-----------	----------	-----------

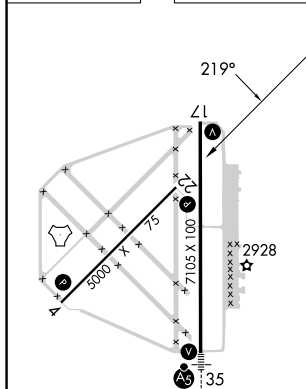

CATEGORY	A	B	C	D
LPV DA	3080-1		200 (200-1)	
LNAV/ VNAV	3168-1		288 (300-1)	
LNAV MDA	3360-1 480 (500-1)		3360-1½ 480 (500-1½)	
CIRCLING	3360-1 475 (500-1)	3360-1½ 475 (500-1½)	3400-1½ 515 (600-1½)	3640-2½ 755 (800-2½)

REIL Rwy 4, 17 and 22 **L**
MIRL Rwy 4-22 **L**
HIRL Rwy 17-35 **L**

LIBERAL, KANSAS
Amdt 1C 05SEP24

37°03'N-100°58'W

LIBERAL MID-AMERICA RGNL (LBL)
RNAV (GPS) RWY 22

NC-2, 15 MAY 2025 to 12 JUN 2025