

TACAN NTU Chan 113	APCH CRS 309°	Rwy Idg 32L 8000 32R 8001
	TDZE 32L 22 Arprt Elev 22	32R 20

[USN]

OCEANA NAS (APOLLO SOUCEK FLD) (KNTU)

TACAN Y RWY 32L/R

ALSIF-1


A1

* When ALS inop, increase CAT AB vis to 1 mile,
CAT CD vis to 1½ miles.

MISSED APPROACH: Climbing left turn to 3000,
intercept NTU TACAN R-223 to GRAIT and hold.

ATIS 317.6	APP/DEP CON 123.9 266.8	TOWER 127.075 360.2	GND CON 119.6 336.4	CLNC DEL 254.4	ASR/ PAR
---------------	----------------------------	------------------------	------------------------	-------------------	-------------

Knots	60	120	180	240	300	360
V/V(fpm)	220	440	660	880	1100	1320
ATC climb of 210 ft/NM to 3000						

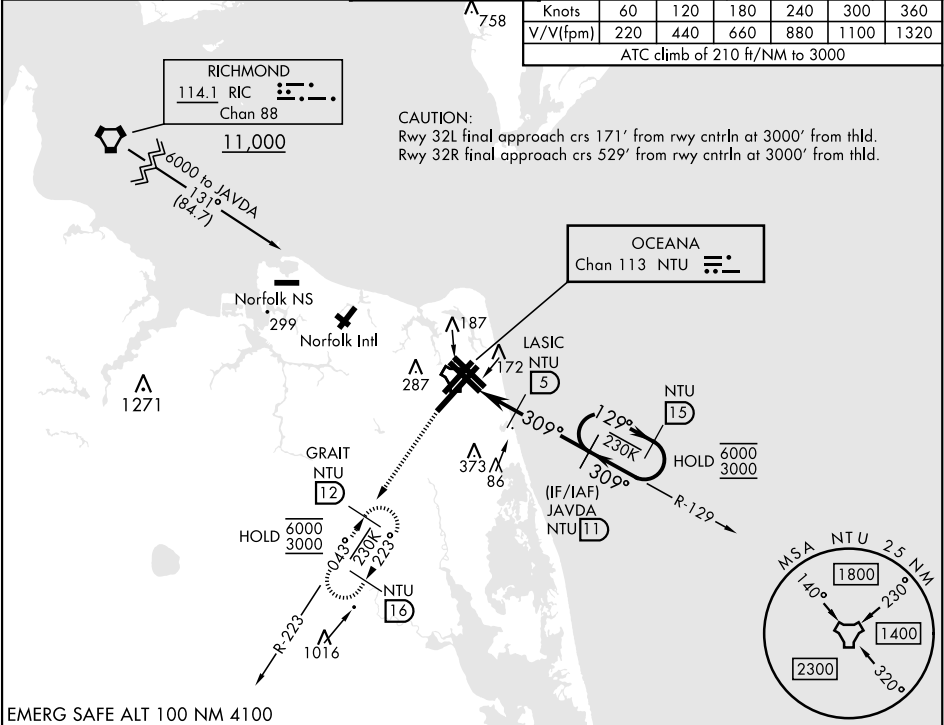

EMERG SAFE ALT 100 NM 4100

3000 NTU R-223

GRAIT NTU 12

NTU TACAN

FIRUT NTU 1.5

NTU 2

LASIC NTU 5

JAVDA NTU 11

NTU 15

129°

309°

1500

3.5 NM

3.31° TCH 55 Rwy 32L

3.33° TCH 55 Rwy 32R

ELEV 22

TDZE 32L 22

TDZE 32R 20

CATEGORY	A	B	C	D
S-32L *	440-½	418 (500-½)	440-¾	418 (500-¾)
S-32R	440-1	420 (500-1)	440-1½	420 (500-1½)
CIRCLING	500-1	478 (500-1)	600-1½	600-2
			578 (600-½)	578 (600-2)

TACAN Y RWY 32L/R