

WAAS CH 42915 W01A	APP CRS 006°	Rwy Idg 5201 TDZE 915 Apt Elev 925
--	------------------------	---

RNAV (GPS) RWY 1

KIRSCH MUNI (IRS)


RNP APCH - GPS.

Circling Rwy 6 NA at night. Rwy 1 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Three Rivers altimeter setting and increase LPV DA to 1219 feet; increase LNAV/VNAV DA to 1395 feet and all visibilities $\frac{1}{2}$ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D $\frac{1}{2}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM. VDP NA when using Three Rivers altimeter setting. Baro-VNAV NA when using Three Rivers altimeter setting.

MISSED APPROACH:

Climb to 2500 direct UKANE and hold.

AWOS-3 121.325	GREAT LAKES APP CON ★ 121.2 239.25	CLNC DEL 118.325	UNICOM 123.05 (CTAF) 0
--------------------------	--	----------------------------	---

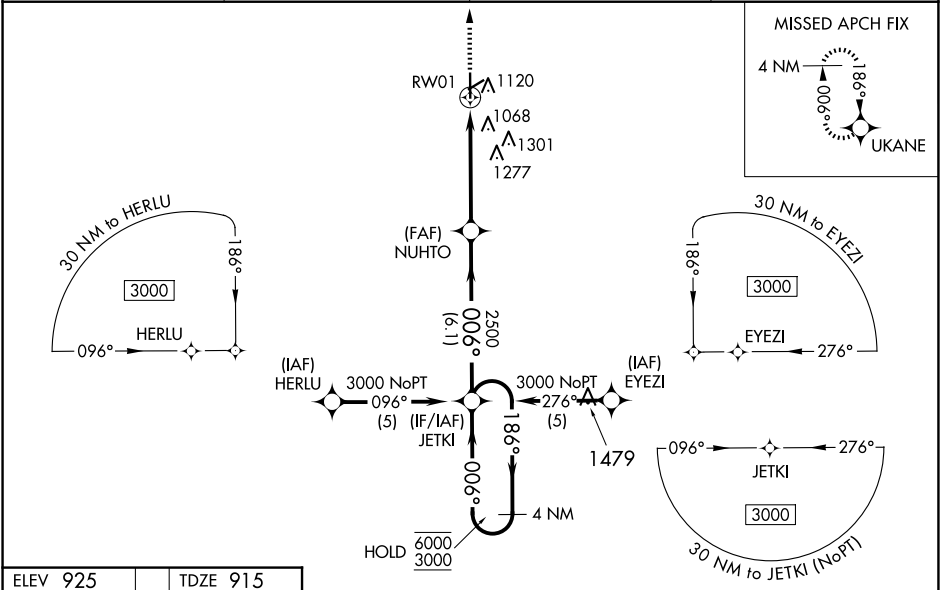

ELEV 925

TDZE 915

REIL Rwy 1, 19 and 24 **0**

MIRL Rwy 1-19 and 6-24 **0**

2500

UKANE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).

4 NM Holding Pattern

JETKI

186° → 6000

← 006° 3000

NUHTO

2500

006°

2500

1.7 NM to RW01

RW01

1.7 NM

3.1 NM

6.1 NM

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	1178-7⁄8 263 (300-7⁄8)			
LNAV/VNAV DA	1354-1¼ 439 (500-1¼)			
LNAV MDA	1480-1 565 (600-1)		1480-1½ 565 (600-1½)	
CIRCLING	1480-1 555 (600-1)		1620-2 695 (700-2)	1620-2¼ 695 (700-2¼)