

WAAS CH 97529 W18A	APP CRS 180°	Rwy Idg TDZE Apt Elev	4002 1279 1279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18


CLOQUET/CARLTON COUNTY (CQ)

RNP APCH.

Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling Rwy 7, 25 NA at night.

MISSED APPROACH: Climb to 2900 direct FIDUP and hold.

AWOS-3 118.525	DULUTH APP CON 125.45 233.7	CLNC DEL 122.15	UNICOM 122.8 (CTAF) 1
--------------------------	---------------------------------------	---------------------------	--

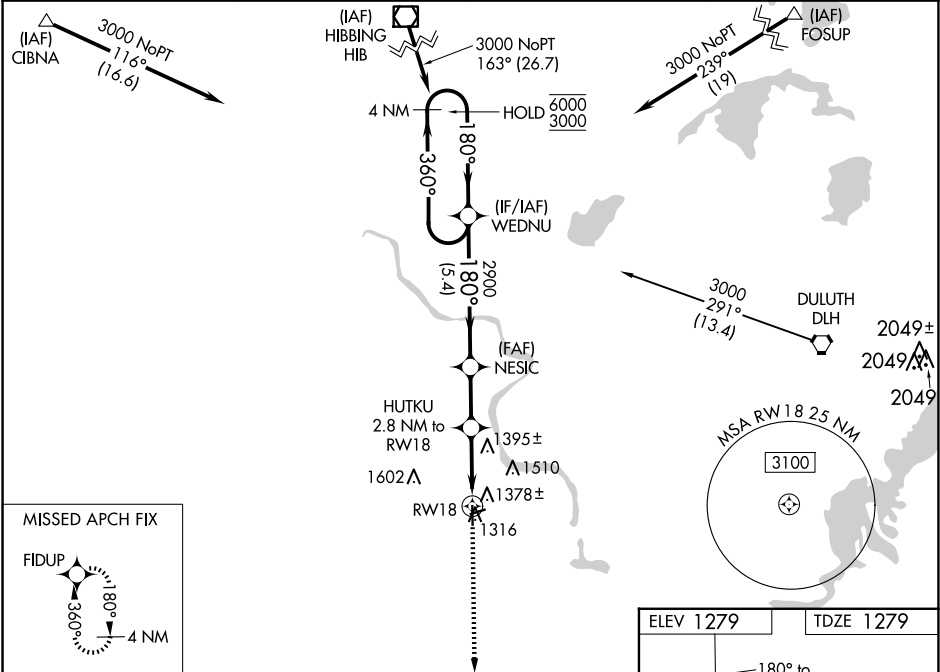

4 NM Holding Pattern		WEDNU		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).		2900	FIDUP
6000 ← 360°				NESIC			
3000 → 180°				2900		HUTKU 2.8 NM to RW18	
		180°		2900		*1.1 NM to RW18	
GP 3.00°				*2200			
TCH 40		5.4 NM		2.2 NM		1.7 NM	
						1.1 NM	
						RW18	
CATEGORY	A	B	C	D			
LPV DA	1557-1 278 (300-1)			NA			
LNAV/VNAV DA	1539-1 260 (300-1)			NA			
LNAV MDA	1660-1	381 (400-1)	1660-1 381 (400-1 1/8)	NA			
CIRCLING	1740-1 461 (500-1)	1860-1 581 (600-1)	1920-1 641 (700-1 3/4)	NA			

