


WAAS CH 56318 W29A	APP CRS 292°	Rwy Idg TDZE Apt Elev	4266 831 838
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29
SPARTA/FORT MC COY (CMY)

⚠ Circling to Rwy 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM not authorized. Baro-VNAV and VDP NA when using La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting and increase all DA 79 feet and all MDA 80 feet; increase LPV all Cats visibility 3/8 mile, and LNAV/VNAV all Cats and LNAV and Circling Cats C/D visibility 1/4 mile. Procedure not authorized when R-6901B is active.

MISSED APPROACH:
Climb to 4000 direct
ESOKY and hold.

ASOS 119.775	VOLK APP CON ★ 135.25 244.875	SPARTA/MC COY TOWER ★ 124.6 254.375	GND CON 123.625	CTAF 124.6
------------------------	---	---	---------------------------	----------------------

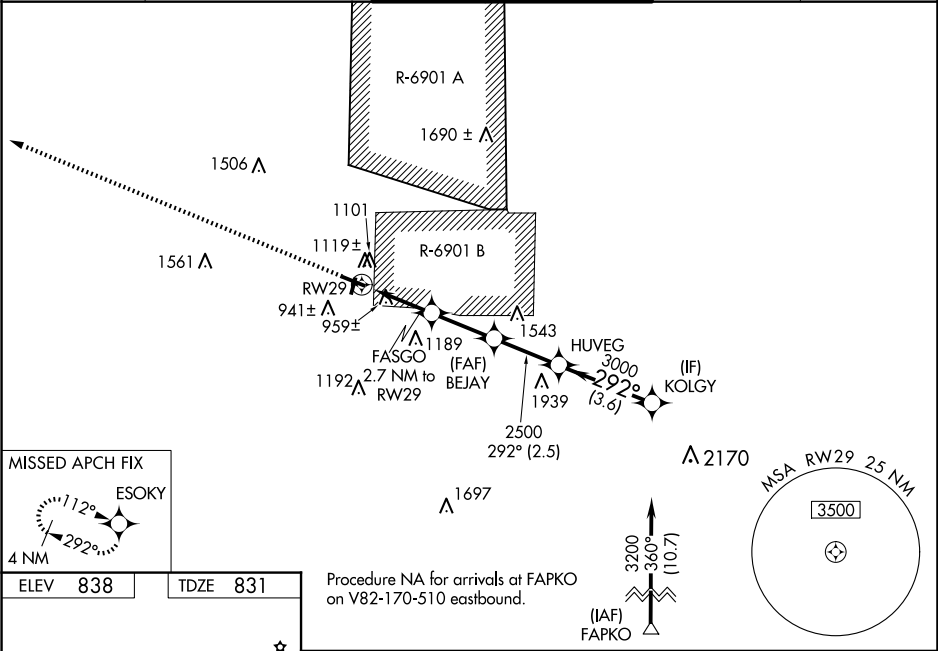

☆

4000 ESOKY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).

***LNAV only**

FASGO 2.7 NM to RW29

BEJAY 2500

HUVEG 3000

KOLGY 3200

GP 3.00° TCH 40

***1.5 NM to RW29**

***1720**

2500

1.5 NM 1.2 NM 2.4 NM 2.5 NM 3.6 NM

CATEGORY	A	B	C	D
LPV DA	1107-7/8	276 (300-7/8)		
LNAV/VNAV DA	1263-1 1/2	432 (500-1 1/2)		
LNAV MDA	1320-1	489 (500-1)	1320-1 3/8	489 (500-1 3/8)
CIRCLING	1520-1 682 (700-1)	1560-1 722 (800-1)	1620-2 1/4 782 (800-2 1/4)	1860-3 1022 (1100-3)

REIL Rwy 11 and 29

MIRL Rwy 1-19 and 11-29

TWR 912

4697 X 100

3032

61

292°

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025