

WAAS CH 57919 W13A	APP CRS 129°	Rwy Idg TDZE 3603 Apt Elev 3607
--	------------------------	---


RNAV (GPS) Y RWY 13
RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C.
ASR

MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

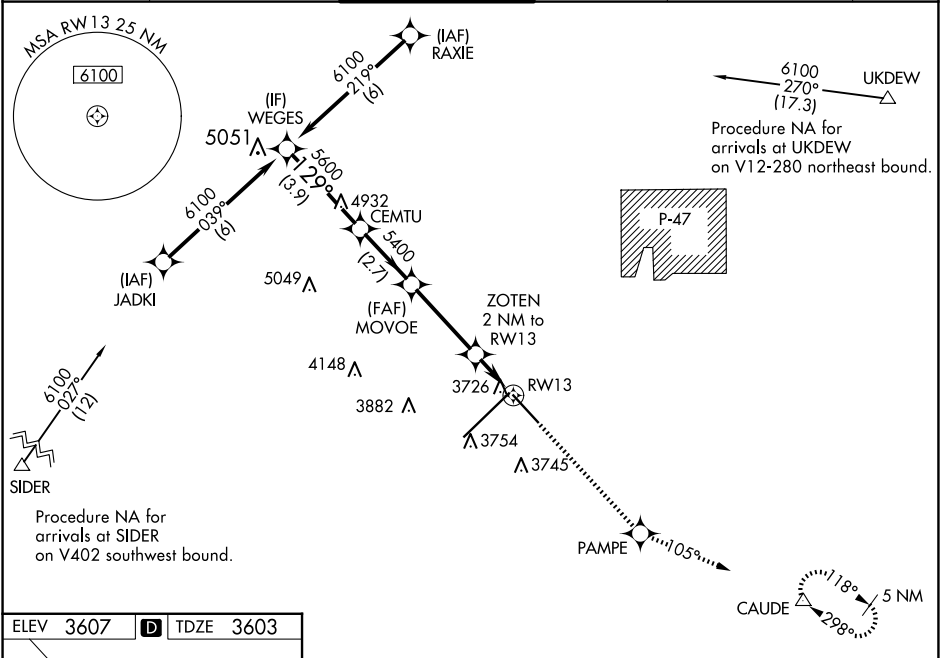

ELEV 3607	D	TDZE 3603
------------------	----------	------------------

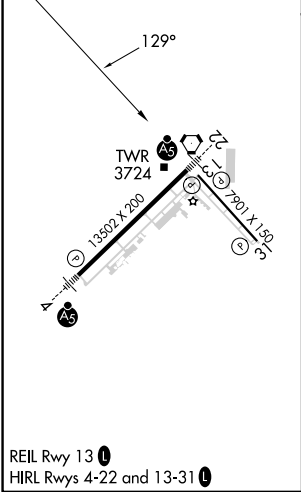

WEGES		5400 ↑		PAMPE ✦		tr 105°		CAUDE △	
6100 Procedure Turn NA GP 3.00° TCH 52		CEMTU		MOVOE 5400		ZOTEN 2 NM to RW13		*LNAV only.	
129°		5600		5400		*4280		*1 NM to RW13	
3.9 NM		2.7 NM		3.4 NM		1 NM		1 NM	
CATEGORY		A		B		C		D	
LPV DA		3803-3/4		200 (200-3/4)					
LNAV/VNAV DA		3976-1 1/4		373 (400-1 1/4)					
LNAV MDA		3980-1		377 (400-1)		3980-1 1/4 377 (400-1 1/4)			
CIRCLING		4080-1		473 (500-1)		4240-1 3/4 633 (700-1 3/4)		4280-2 1/4 673 (700-2 1/4)	

SC-2, 12 JUN 2025 to 10 JUL 2025

SC-2, 12 JUN 2025 to 10 JUL 2025