ILS or LOC RWY 12
HURON RGNL (HON)

LOC/DME I-HON	APP CRS	Rwy ldg	7201
110.3	121°	TDZE	1289
Chan 40		Apt Elev	1289

RNAV 1-GPS or RADAR required for procedure entry. ADF required.
From HUMSO and WEDEM: RNAV-1 GPS required.

T A Circling Rwy 18, 36 NA at night. For inop ALS, increase S-LOC 12 Cat C/D to 1⅜ SM.

MALSR A5

MISSED APPROACH: Climb to 3000 then left turn direct BEADY LOM and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
118.125	126.25 339.8	123.0 (CTAF) L

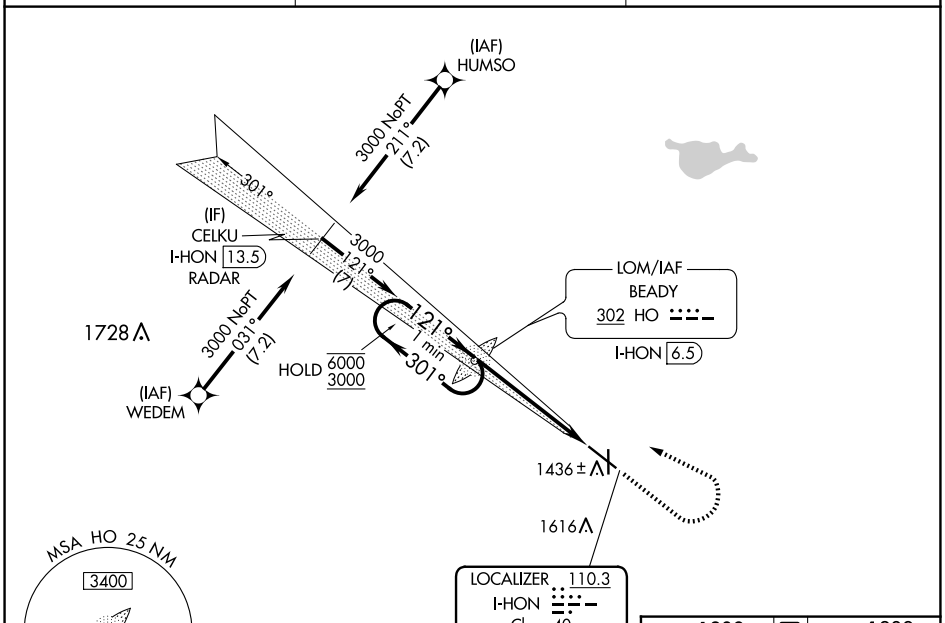

ELEV 1289	D	TDZE 1289

HIRL Rwy 12-30 L
MIRL Rwy 18-36 L
REIL Rwys 18, 30 and 36 L

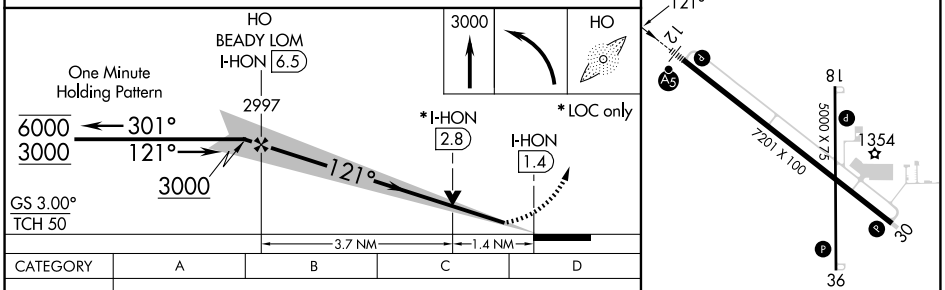

CATEGORY	A	B	C	D
S-ILS 12	1489-½ 200 (200-½)			
S-LOC 12	1780-½ 491 (500-½)		1780-1 491 (500-1)	
C CIRCLING	1820-1 531 (600-1)		1920-1¾ 631 (700-1¾)	1980-2¼ 691 (700-2¼)

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NC-1, 12 JUN 2025 to 10 JUL 2025
NC-1, 12 JUN 2025 to 10 JUL 2025