

WAAS CH 78328 W11A	APP CRS 107°	Rwy Idg TDZE Apt Elev	4713 408 408
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 11

MILLINOCKET MUNI (MLT)

RNP APCH.


▼

▲

Baro-VNAV NA when using Houlton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 41°C. Rwy 11 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Houlton altimeter setting and increase all DA and MDA 120 feet; increase LPV and LNAV/VNAV visibility all Cats ½ SM and LNAV visibility Cat B ¼ SM and Cat C/D ½ SM. Procedure NA at night.

MISSED APPROACH:
Climb to 2300 direct JEBIV and hold.

ASOS 135.225	BOSTON CENTER 120.25 346.4	UNICOM 122.8 (CTAF)
------------------------	--------------------------------------	-------------------------------

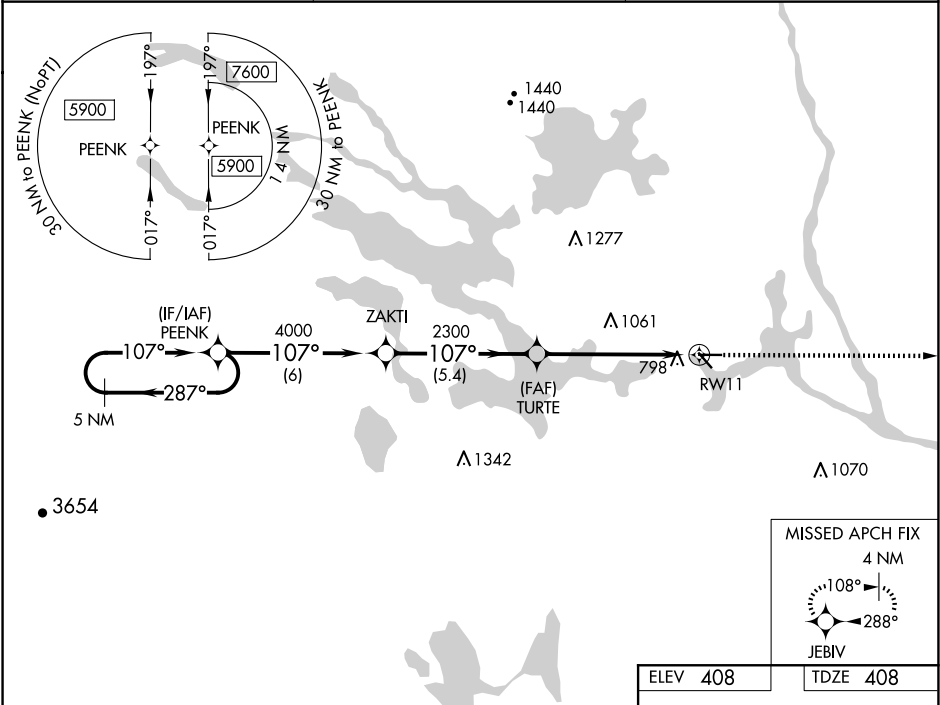

5 NM Holding Pattern 5900 ← 287° 107° → GP 3.00° TCH 51					PEENK ZAKTI TURTE 2300 RW11		2300 ↑	JEBIV ✦	
107° 4000 2300 6 NM 5.4 NM 5.8 NM									
CATEGORY		A	B	C	D				
LPV	DA	929-1 ³ / ₄ 521 (600-1 ³ / ₄)							
LNAV/ VNAV	DA	1004-2 596 (600-2)							
LNAV	MDA	1100-1 692 (700-1)			1100-2 692 (700-2)				

ELEV 408

TDZE 408

REIL Rwy 29
MIRL Rwy 11-29