
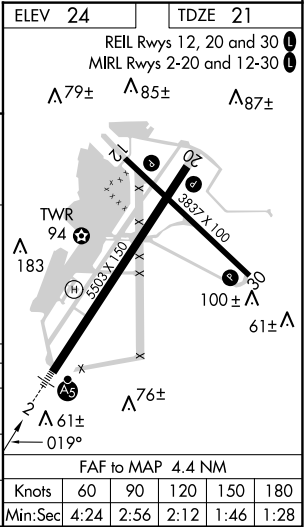
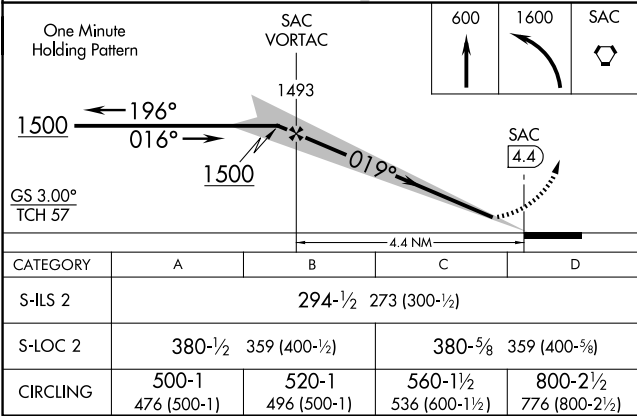


LOC I-SAC 110.3	APP CRS 019°	Rwy Idg 5503 TDZE 21 Apt Elev 24
---------------------------	------------------------	---

ILS or LOC RWY 2
SACRAMENTO EXEC (SAC)

▼ When local altimeter setting not received, use Sacramento Intl altimeter setting and increase DA to 322 feet, increase all MDAs 40 feet and Circling Cat D visibility ¼ SM. Autopilot coupled approach NA below 335 feet. For inop MALSRS, increase S-ILS 2 all Cats visibility to ¾ SM and S-LOC 2 Cat C/D visibility to 1 SM. For inop MALSRS when using Sacramento Intl altimeter setting, increase S-ILS 2 all Cats visibility to ¾ SM.	MALSRS 	MISSED APPROACH: Climb to 600 then climbing left turn to 1600 direct SAC VORTAC and hold.
--	---	--

ATIS 125.5	NORCAL APP CON 125.25 257.9	EXEC TOWER★ 119.5 (CTAF) 0 278.8	GND CON 125.0	UNICOM 122.95
----------------------	---------------------------------------	--	-------------------------	-------------------------

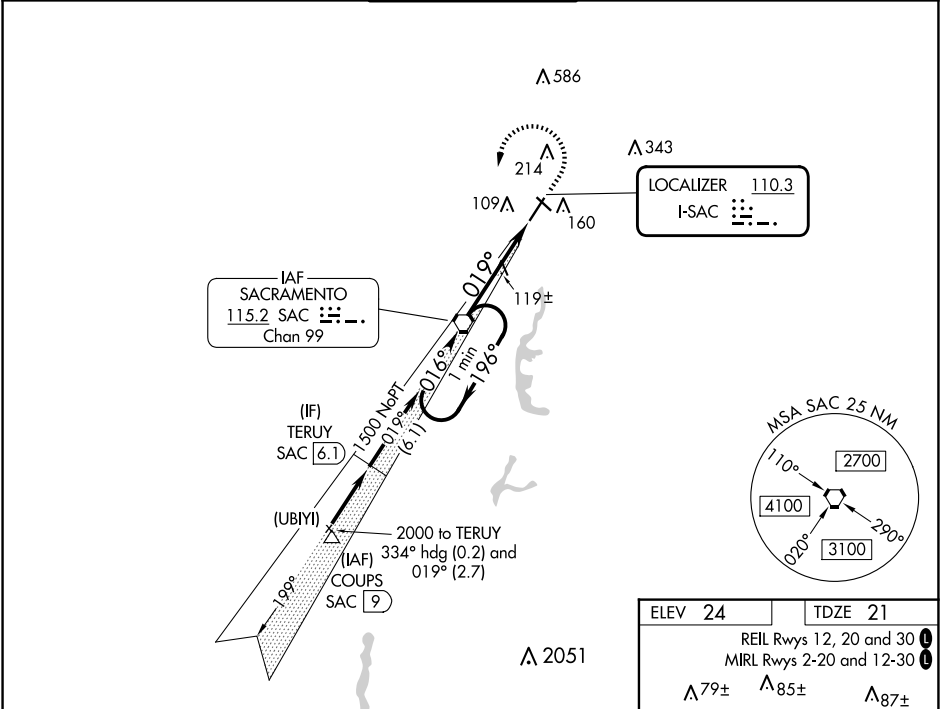

SW-2, 12 JUN 2025 to 10 JUL 2025

SW-2, 12 JUN 2025 to 10 JUL 2025