


WAAS CH 82740 W34A	APP CRS 338°	Rwy Ldg TDZE Apt Elev 4606
--	------------------------	---

RNAV (GPS) RWY 34


SOUTH VALLEY RGNL (SVR)

RNP APCH - GPS.	MISSED APPROACH: Climb to 9000 direct DUYDE and on track 309° to KITBE and on track 268° to STACO and hold.
VDP NA when using SLC altimeter setting. Baro-VNAV NA. When local altimeter setting not received, use SLC altimeter setting and increase all LPV DA to 4956 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 5159 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat B ¼ SM.	

AWOS-3PT 134.425	SALT LAKE CITY APP CON 120.9 322.3	CLNC DEL 127.0	UNICOM 122.7 (CTAF) 0
----------------------------	--	--------------------------	---------------------------------

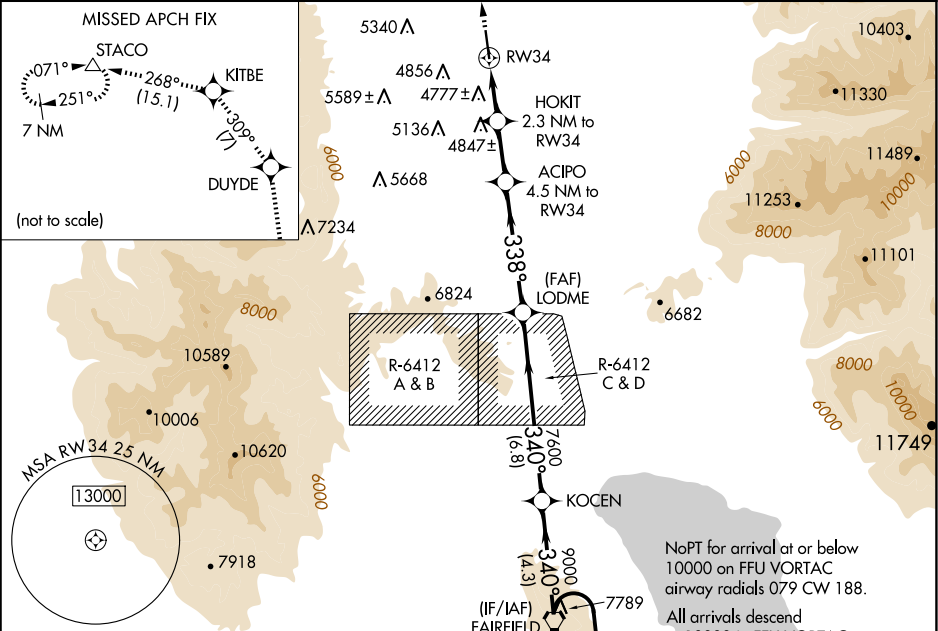

ELEV 4606	TDZE 4606
-----------	-----------

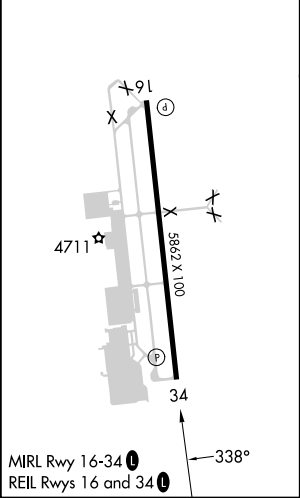

9000 ↑	DUYDE ✱	fr 309°	KITBE ✱	fr 268°	STACO △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).			
						KOCEN	FAIRFIELD FFU	7 NM Holding Pattern	
						HOKIT 2.3 NM to RW34	ACIPO 4.5 NM to RW34	LODME 7600	
						1.3 NM to RW34		340°	
						5380	6080	7600	
						160°	12000	340°	9000
						GP 3.00° TCH 58			
						1.3	1.1	2.2 NM	4.7 NM
						6.8 NM			
						4.3 NM			
CATEGORY		A		B		C		D	
LPV	DA	4881-7/8		275 (300-7/8)					
LNAV/ VNAV	DA	5084-13/8		478 (500-13/8)					
LNAV	MDA	5040-1		434 (500-1)		5040-11/4		434 (500-11/4)	
CIRCLING		5180-1		5360-1		5780-3		6040-3	
		574 (600-1)		754 (800-1)		1174 (1200-3)		1434 (1500-3)	