


VORTAC TXK <u>116.3</u> Chan 110	APP CRS 122°	Rwy Idg 4559 TDZE 388 Apt Elev 390
--	------------------------	---

VOR RWY 13
TEXARKANA RGNL-WEBB FLD (TXK)

T When local altimeter setting not received, use De Queen altimeter setting and increase all MDA 100 feet, increase S-13 and Cat C and D visibility $\frac{1}{4}$ SM, and Circling Cat C and D visibility $\frac{1}{4}$ SM. Visibility reduction by helicopters NA. VDP NA when using De Queen altimeter setting.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct TXK VORTAC and hold.

ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235.625	GND CON 119.225
----------------------	---	--	---------------------------

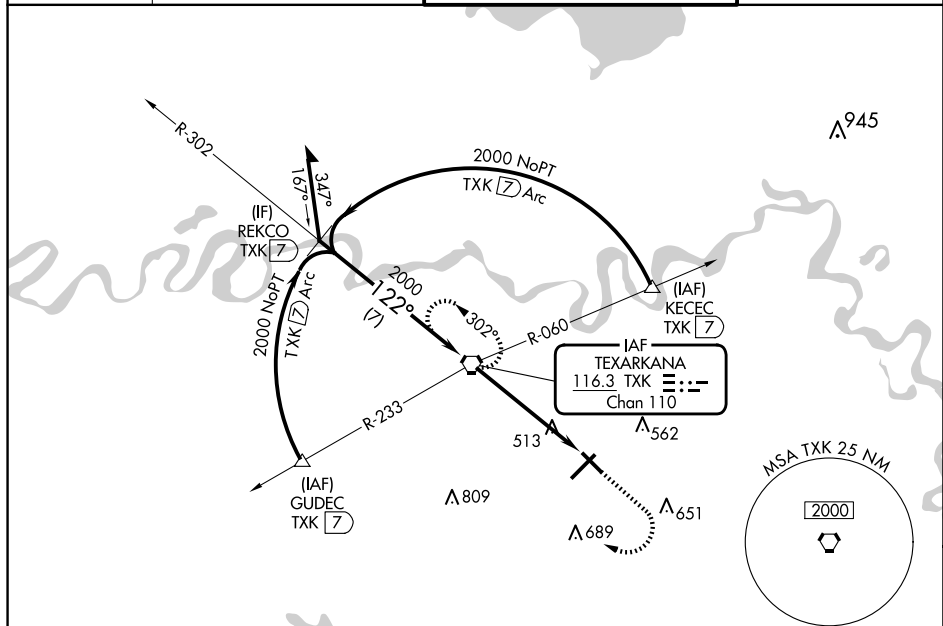

VGSI and descent angles not coincident
(VGSI angle 3.00/TCH 48).

Remain
within 10 NM

within 10 NM

2000

30°

122°

2000

← 4.1 NM → 1.2 NM

CATEGORY	A	B	C	D
S-13	780-1 392 (400-1)		780-1 $\frac{1}{8}$ 392 (400- $\frac{1}{8}$)	780-1 $\frac{1}{4}$ 392 (400-1 $\frac{1}{4}$)
CIRCLING	820-1 430 (500-1)	900-1 510 (600-1)	1000-1 $\frac{3}{4}$ 610 (700-1 $\frac{3}{4}$)	1080-2 $\frac{1}{4}$ 690 (700-2 $\frac{1}{4}$)

ELEV 390

D

TDZE 388

122°

TWR 455

500 X 100

6692 X 150

0.7% UP

0.5% UP

MIRL Rwy 13-31

HIRL Rwy 4-22

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

TEXARKANA, ARKANSAS

Amdt 16C 10AUG23

TEXARKANA RGNL-WEBB FLD (TXK)

VOR RWY 13

33°27'N-93°59'W

SC-1, 12 JUN 2025 to 10 JUL 2025

SC-1, 12 JUN 2025 to 10 JUL 2025