

APP CRS	Rwy Idg	8417
194°	TDZE	2117
	Apt Elev	2181

RNAV (RNP) Z RWY 19R


HARRY REID INTL (LAS)

RNP AR APCH - GPS, RF, min RNP 0.50. Authorization required. Missed approach requires RNP < 1.00.


MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to MATLR and hold, continue climb-in-hold to 7000.

Missed approach requires minimum climb of 235 feet per NM to 2960.

D-ATIS	LAS VEGAS APP CON		LAS VEGAS TOWER		GND CON		CLNC DEL	CPDLC
132.4	125.025	379.15 (West)	118.75	257.8 (Rwy 1L/19R, 1R/19L)	121.1	270.8 E of 1R/19L		
	119.775	282.2 (East)	119.9	257.8 (Rwy 8L/26R, 8R/26L)	121.9	254.3 W of 1L/19R		

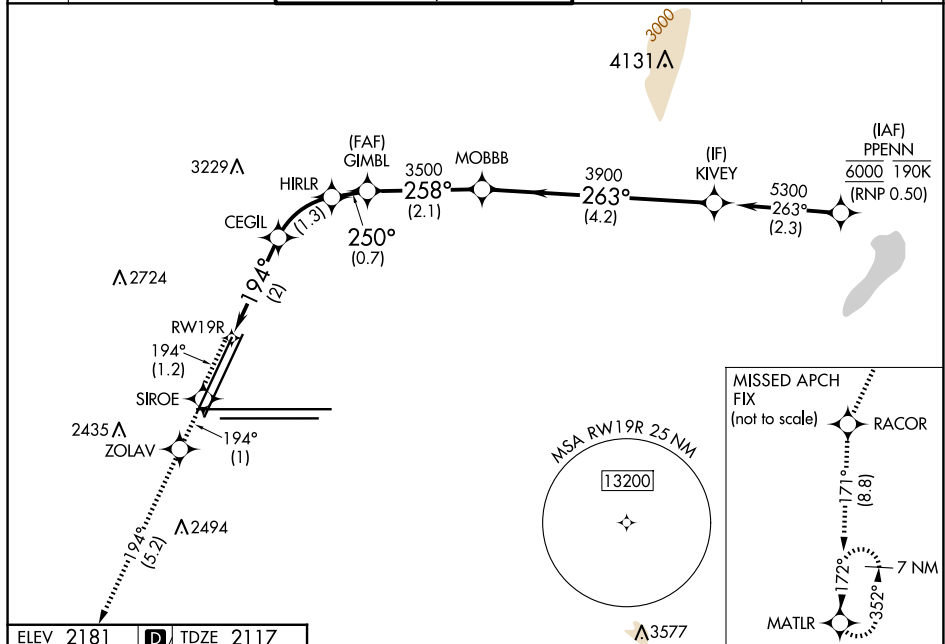


ELEV 2181	D	TDZE 2117
-----------	----------	-----------



7000	SIROE		ZOLAV		RACOR		MATLR
↑ tr 194°		tr 194°		tr 194°		tr 171°	

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.04/TCH 80).

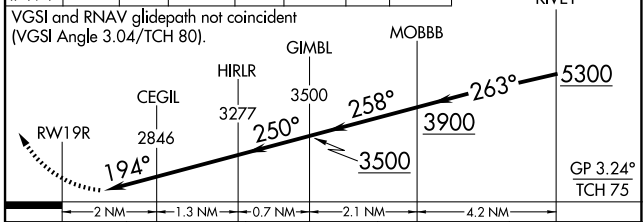

CATEGORY	A	B	C	D
RNP 0.10 DA*		2558-1 $\frac{3}{8}$	441 (400-1 $\frac{3}{8}$)	
RNP 0.20 DA#		2608-1 $\frac{3}{8}$	491 (500-1 $\frac{3}{8}$)	
RNP 0.30 DA		2669-1 $\frac{5}{8}$	552 (500-1 $\frac{5}{8}$)	

AUTHOR|ZATION REQUIRED