


WAAS CH 90407 W26B	APP CRS 258°	Rwy Ldg TDZE 10200 926 Apt Elev 944
--	------------------------	---

RNAV (GPS) Y RWY 26L


ONTARIO INTL (ONT)

RNP APCH - GPS. ✚ Circling NA north of Rwy 8L-26R. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase all Cats LNAV/VNAV visibility to RVR 5500.	ALSF-2 	MISSED APPROACH: Climb to 4700 direct HERZO and on track 170° to MAHOY and on track 083° to PDZ VORTAC, continue climb in hold to 4700.
--	---	---

D-ATIS 124.25	SOCAL APP CON 127.0 318.2	ONTARIO TOWER 120.6 360.775	GND CON 121.9 257.8	CLNC DEL 132.9	CPDLC
-------------------------	-------------------------------------	---------------------------------------	-------------------------------	--------------------------	-------

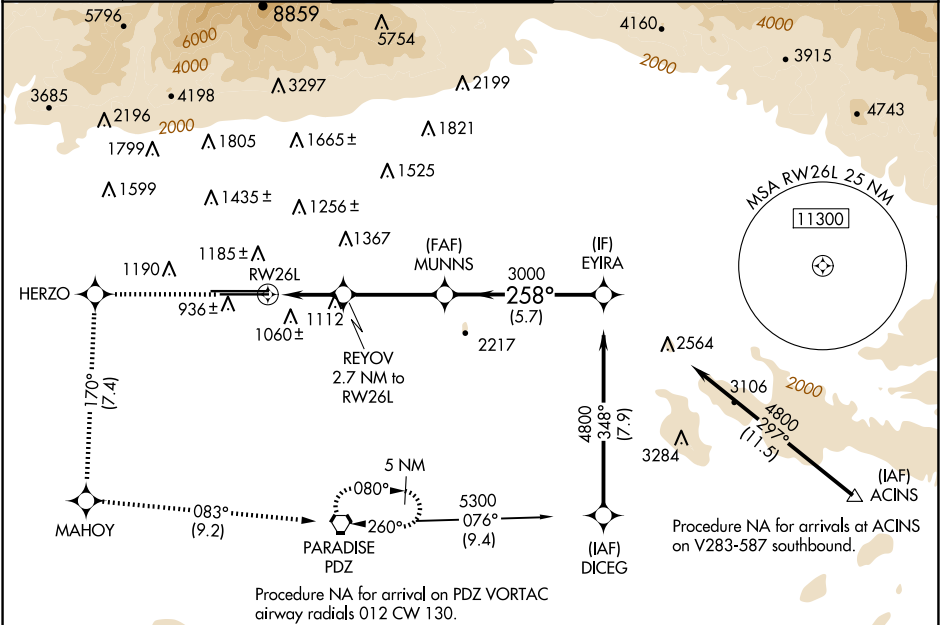

ELEV 944	D	TDZE 926
-----------------	----------	-----------------

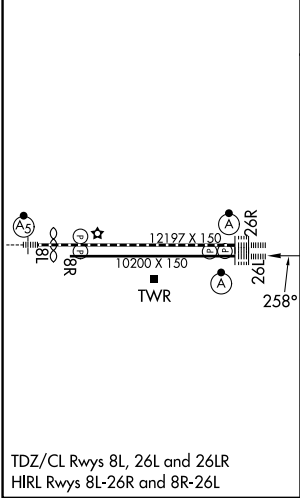

4700	HERZO	tr 170°	MAHOY	tr 083°	PDZ	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).			
						MUNNS	EYIRA		
						3000	258°		4800
						GP 3.00° TCH 58			
CATEGORY	A		B		C		D		
LPV DA			1126/18		200 (200-½)				
LNAV/VNAV DA			1267/30		341 (400-¾)				
LNAV MDA	1380/24		454 (500-½)		1380/45		454 (500-¾)		
CIRCLING	1400-1		456 (500-1)		1500-1½ 556 (600-1½)		1540-2 596 (600-2)		