

MUNCIE, INDIANA

AL-5011 (FAA)

25163

WAAS CH 78237 W03A	APP CRS 025°	Rwy Ldg 5197 TDZE 937 Apt Elev 937
--	------------------------	---

RNAV (GPS) RWY 3



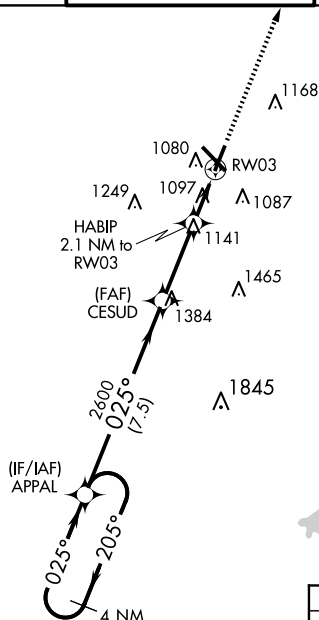
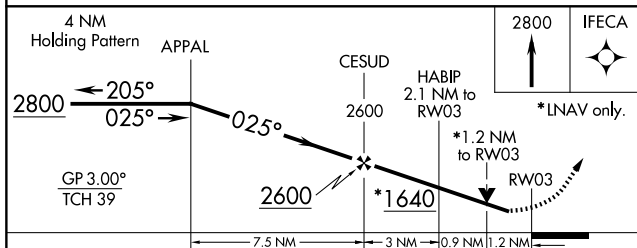
DELAWARE COUNTY RGNL (MIE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ¾ mile, LNAV/VNAV all Cats visibility ¾ mile and Circling Cats C/D visibility ½ mile. Baro-VNAV NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2800 direct
IFECA and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

RADAR REQUIRED

[illegible]

CATEGORY	A	B	C	D
LPV DA	1190-7 ₈ 253 (300-7 ₈)			
LNAV/VNAV DA	1412-1 ⁵ ₈ 475 (500-1 ⁵ ₈)			
LNAV MDA	1360-1 423 (500-1)		1360-1 ¹ ₄ 423 (500-1 ¹ ₄)	
 CIRCLING	1460-1 523 (600-1)		1500-1 ¹ ₂ 563 (600-1 ¹ ₂)	1600-2 663 (700-2)

MUNCIE, INDIANA
Orig 05MAR15

40°15'N-85°24'W

DELAWARE COUNTY RGNL (MIE)
RNAV (GPS) RWY 3

EC-2, 12 JUN 2025 to 10 JUL 2025

EC-2, 12 JUN 2025 to 10 JUL 2025