

HOUMA, LOUISIANA

AL-5037 (FAA)

25163

WAAS CH 99413 W18A	APP CRS 179°	Rwy Ldg 6143 TDZE 8 Apt Elev 9
--	------------------------	---

RNAV (GPS) RWY 18
HOUMA-TERREBONNE (HUM)

⚠ Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP 0.3 NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting: increase LPV DA to 285, increase LNAV/VNAV DA to 526 and all visibilities ½ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM. For inop AIs when using Louis Armstrong New Orleans Intl altimeter setting increase all LPV visibilities to ¾ SM, increase all LNAV/VNAV visibilities and LNAV Cats C and D visibility to 1¾ SM.

MALSR



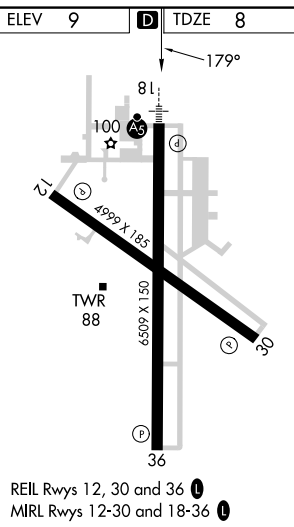
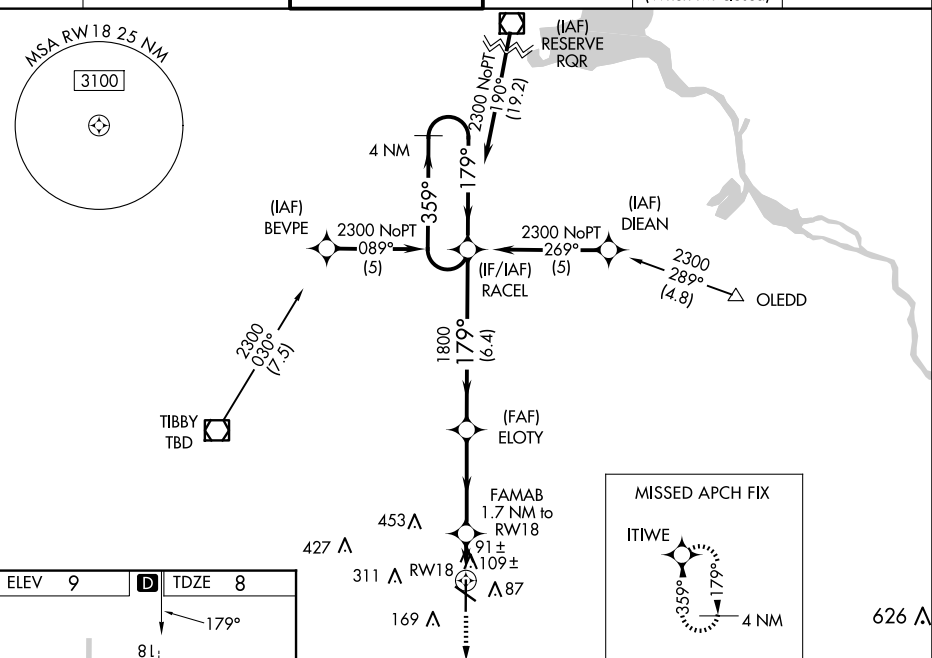
MISSED APPROACH:
Climb to 1900 direct
ITWE and hold.

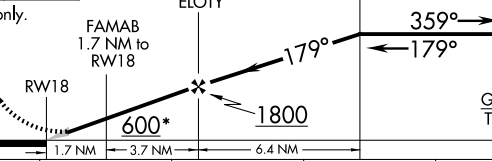
ATIS	NEW ORLEANS APP CON
120.25	118.9 350.35

HOUMA TOWER ★
25.3 (CTAF) **L** 346.3

GND CON
123.875

CLNC DEL
118.9
(When btyr closed)

UNICOM
122.95

1900 		ITWE 		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).		4 NM Holding Pattern	
*LNAV only.							
CATEGORY	A	B	C	D			
LPV DA	208-1/2	200 (200-1/2)					
LNAV/VNAV DA	449-7/8	441 (500-7/8)					
LNAV MDA	440-1/2	432 (500-1/2)	440-3/4	432 (500-3/4)			
 CIRCLING	480-1	471 (500-1)	760-2 1/4 751 (800-2 1/4)	760-2 1/2 751 (800-2 1/2)			

HOUMA, LOUISIANA

Orig-B 15JUL21

29°34'N-90°40'W

HOUMA-TERREBONNE (HUM)
RNAV (GPS) RWY 18

SC-4, 12 JUN 2025 to 10 JUL 2025

SC-4, 12 JUN 2025 to 10 JUL 2025