

WAAS CH 53608 W17A	APP CRS 173°	Rwy Idg 4605 TDZE 1827 Apt Elev 1827
--	------------------------	---

RNAV (GPS) RWY 17

CURTIS FLD (BBD)


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.
Baro-VNAV and VDP NA when using JCT altimeter setting. When local altimeter setting not received, use JCT altimeter setting: increase LPV DA to 2144 feet; increase LNAV/VNAV DA to 2194 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM.

MISSED APPROACH: Climb to 4000 direct JENEV and hold.

AWOS-3 118.375	HOUSTON CENTER 132.35 317.5	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

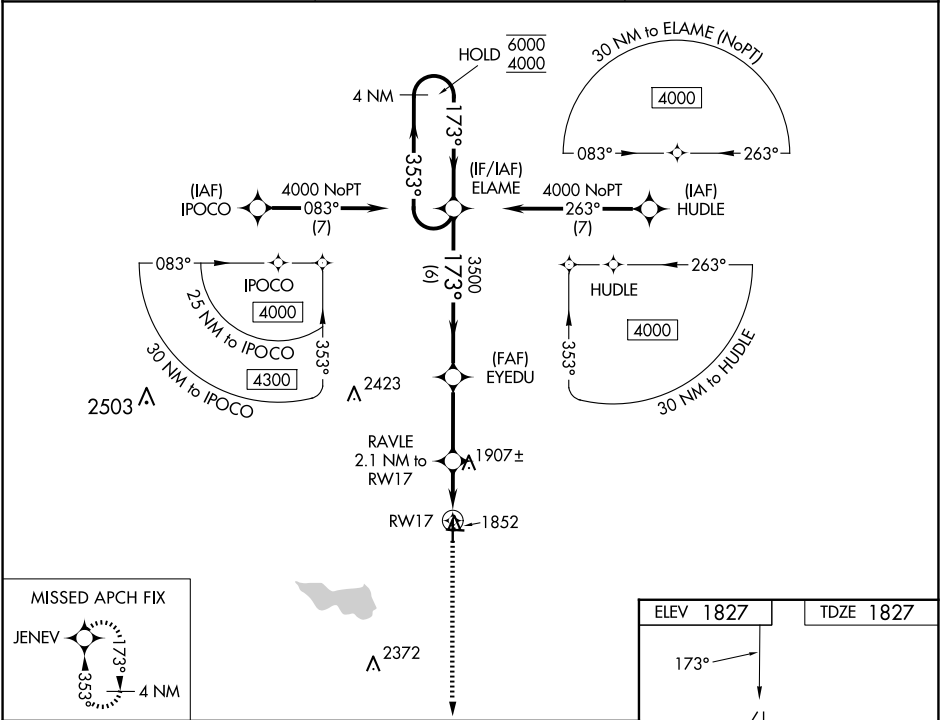

4 NM Holding Pattern		ELAME		4000 ↑		JENEV ✧	
6000 ← 353° 4000 → 173°		EYEDU 3500		RAVLE 2.1 NM to RW17		0.9 NM to RW17	
GP 3.00° TCH 40		3500		2540		RW17	
		6 NM		3 NM		1.2 NM	
						0.9	
CATEGORY	A	B	C	D			
LPV DA	2027-1	200 (200-1)		NA			
LNAV/VNAV DA	2077-1	250 (300-1)		NA			
LNAV MDA	2160-1	333 (400-1)		NA			

