

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>65832</b><br><b>W18A</b> | APP CRS<br><b>182°</b> | Rwy Idg<br>TDZE <b>239</b><br>Apt Elev <b>239</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 18


DELTA RGNL (DRP)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting: increase LPV DA to 507 feet and all visibilities 1⁄8 SM; increase LNAV/VNAV DA to 668 feet and all visibilities 1⁄4 SM; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct USUDY and hold, continue climb-in-hold to 3000.

|                         |                                      |                                 |
|-------------------------|--------------------------------------|---------------------------------|
| AWOS-3P<br><b>120.0</b> | MEMPHIS CENTER<br><b>135.3 335.8</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|-------------------------|--------------------------------------|---------------------------------|

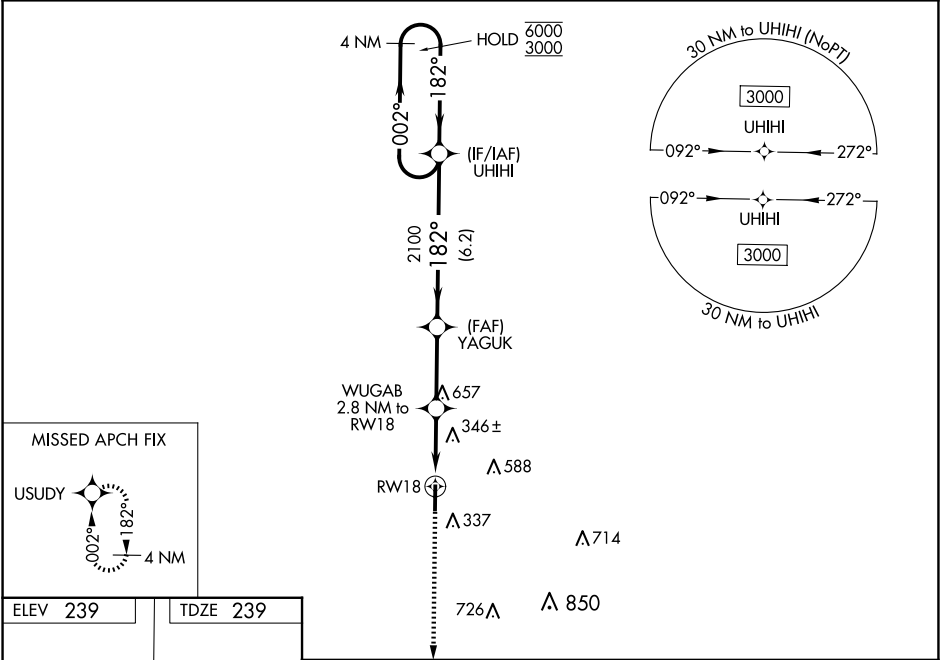

ELEV **239**

TDZE **239**

HIRL Rwy 18-36 **0**

REIL Rwy 18 & 36 **0**

|                      |          |                               |    |   |
|----------------------|----------|-------------------------------|----|---|
| 3000<br>↑<br>USUDY   |          | UHIHI<br>4 NM Holding Pattern |    |   |
|                      |          | GP 3.00°<br>TCH 44            |    |   |
| YAGUK<br>2100        |          | WUGAB<br>2.8 NM to RW18       |    |   |
| RW18<br>1 NM to RW18 |          | 1160                          |    |   |
| 1 NM                 |          | 1.8 NM                        |    |   |
| 2.9 NM               |          | 6.2 NM                        |    |   |
| CATEGORY             | A        | B                             | C  | D |
| LPV DA               | 439-3/4  | 200 (200-3/4)                 | NA |   |
| LNAV/<br>VNAV        | DA 600-1 | 361 (400-1)                   | NA |   |
| LNAV MDA             | 600-1    | 361 (400-1)                   | NA |   |
| CIRCLING             | 760-1    | 521 (600-1)                   | NA |   |

SC-1, 12 JUN 2025 to 10 JUL 2025

SC-1, 12 JUN 2025 to 10 JUL 2025