

WAAS CH 78000 W05A	APP CRS 047°	Rwy Ldg TDZE 196 Apt Elev 196
--	------------------------	---

RNAV (GPS) RWY 5

SOUTHWEST GEORGIA RGNL (ABY)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.
▲ ** RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 2000
direct UNIKE and left turn on track
291° to PZD VOR/DME and hold.

ATIS 133.05	JACKSONVILLE CENTER 125.75 363.075	ALBANY TOWER ★ 120.25 (CTAF) 0336.4	GND CON 121.9 348.6	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

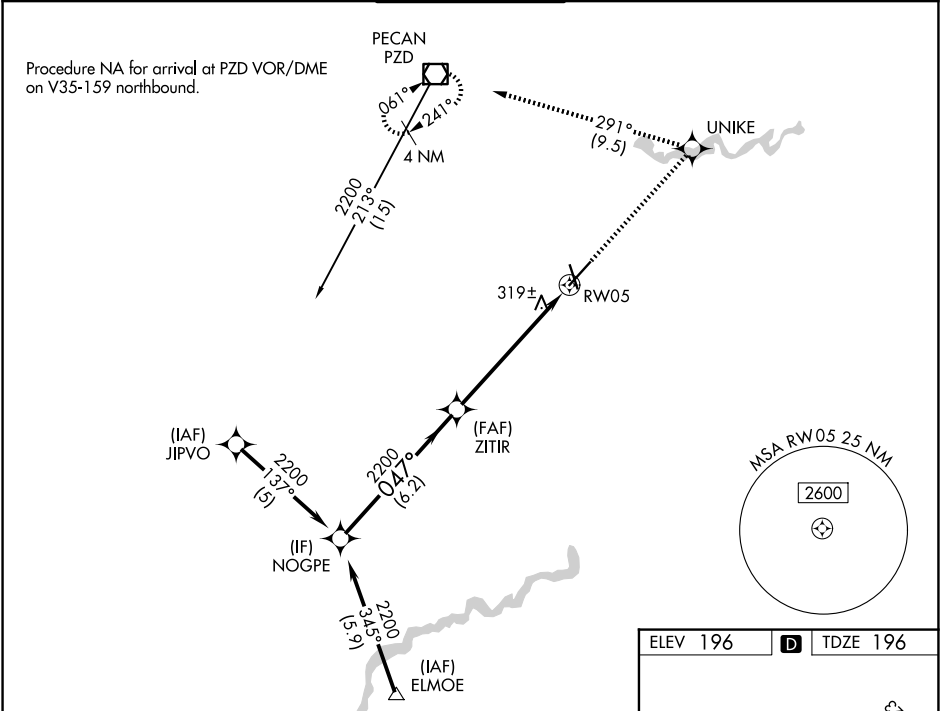

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).				
NOGPE		ZITIR	2000 UNIKE	PZD
2200		2200	tr 291°	
GP 3.00°		*1 NM to RW05	*LNAV only.	
TCH 60		RW05		
6.2 NM		5 NM	1 NM	
CATEGORY	A	B	C	D
LPV DA**	396/24 200 (200-½)			
LNAV/VNAV DA	635/50 439 (500-1)			
LNAV MDA	580/24		384 (400-½)	580/50 384 (400-1)
CIRCLING	640-1 444 (500-1)	660-1 464 (500-1)	940-2¼ 744 (800-2¼)	940-2½ 744 (800-2½)

