

WAAS CH 97618 W17A	APP CRS 175°	Rwy Idg TDZE 8803 2562 Apt Elev 2573
--	------------------------	--

RNAV (GPS) RWY 17

BIG SPRING/MC MAHON-WRINKLE (BPG)


RNP APCH.

Inop table does not apply to LNAV/VNAV and LNAV Cat C. When local altimeter setting not received, use Midland Intl Air and Space Port altimeter setting: increase all DA 130 feet and all MDA 140 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cat C and D visibility ½ SM. Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting. VDP NA with Midland Intl Air and Space Port altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 43°C.

SSALS

MISSED APPROACH: Climb to 4600 direct NEGCI and hold.

AWOS-3PT 118.025	FORT WORTH CENTER 133.7 350.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

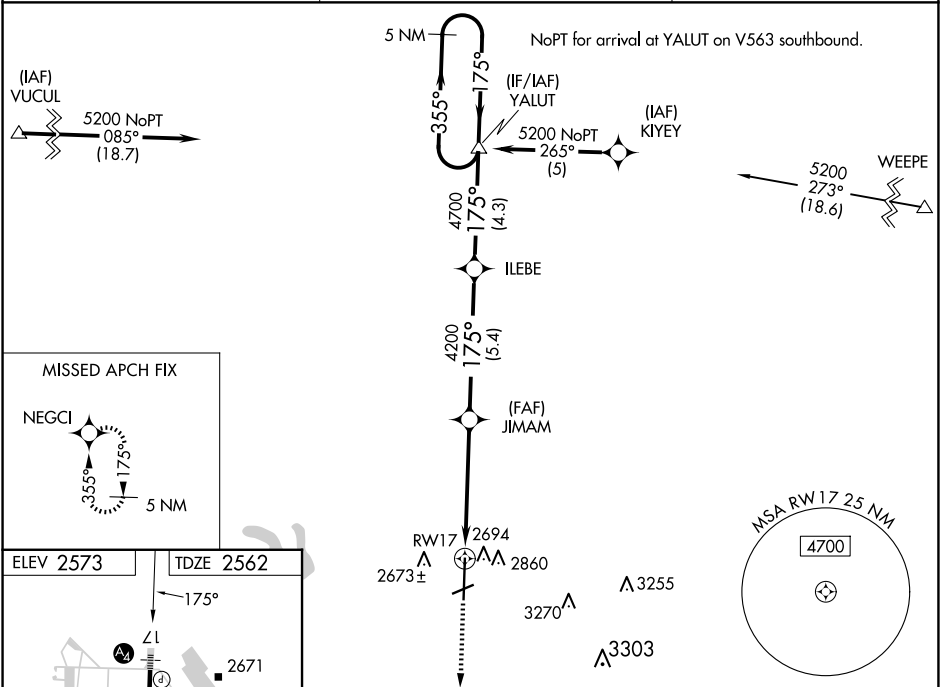

ELEV 2573	TDZE 2562
*LNAV only. *1.8 NM to RW17	
RW17 1.8 NM 3.2 NM 5.4 NM 4.3 NM	
CATEGORY	A B C D
LPV DA	2812-1 250 (300-1)
LNAV/VNAV DA	3040-1¾ 478 (500-1¾)
LNAV MDA	3160-¾ 598 (600-¾) 3160-1½ 598 (600-1½) 3160-1¾ 598 (600-1¾)