


LOC/DME I-MDW	APP CRS	Rwy Ldg	6059
109.9	138°	TDZE	611
Chan 36		Apt Elev	620

ILS or LOC RWY 13L


CHICAGO MIDWAY INTL (MDW)

DME required for LOC only.	MISSED APPROACH: Climb to 1100 then climbing right turn to 2300 on heading 220° and on EON VORTAC R-001 until crossing IGENCY INT/EON 20 DME then climb to 2600 to EON VORTAC and hold.
Rwy 13L helicopter visibility reduction below RVR 4000 NA.	

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

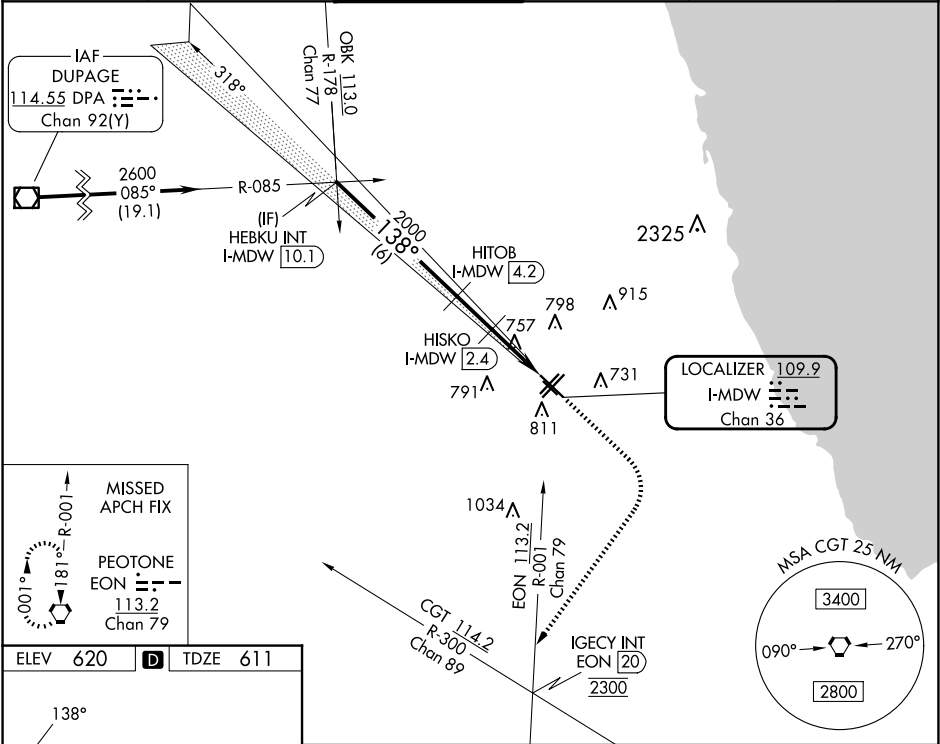

ELEV 620	D	TDZE 611
----------	---	----------

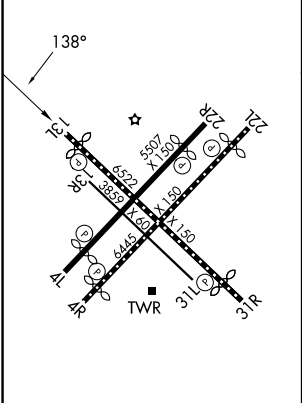

REIL Rwy 4R, 22L and 31R
RLS Rwy 13L and 31R
HIRL Rwy 4R-22L and 13L-31R
MIRL Rwy 4L-22R and 13R-31L

HEBKU INT I-MDW 10.1	HITOB I-MDW 4.2	HSKO I-MDW 2.4	I-MDW 1.1	I-MDW DME ANTENNA	I-MDW 0.1
2600	2000	1440	1100	2300	2600
GS 3.00° TCH 46	138°	1440	1100	2300	2600
6 NM	1.7 NM	1.4 NM	1.1 NM		
CATEGORY	A	B	C	D	
S-ILS 13L	861/40	250 (300-3/4)			
S-LOC 13L	1020/55	409 (400-1)	1020/60	409 (400-1 1/4)	
CIRCLING	1120-1	500 (500-1)	1340-2	1340-2 1/4	
			720 (800-2)	720 (800-2 1/4)	