

WAAS CH 70310 W13A	APP CRS 131°	Rwy Idg 6568 TDZE 46 Apt Elev 46
--	------------------------	---

RNAV (GPS) RWY 13R
WILLIAM P HOBBY (HOU)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to RVR 5000; increase LNAV/VNAV Cats A/B/C/D visibility to 1½ SM, Cat E to 1½ SM; and increase LNAV Cats A/B visibility to RVR 5500, Cats C/D to 1½ SM, Cat E to 1¾ SM. Rwy 13R helicopter visibility reduction below ¾ SM NA.

MALSR



MISSED APPROACH: Climb to 2200 direct LESLO and on track 134° to VUH VOR/DME.

D-ATIS 124.6	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOBBY TOWER 118.7 256.9	GND CON 121.9	CLNC DEL 125.45	CPDLC
------------------------	--	-----------------------------------	-------------------------	---------------------------	-------

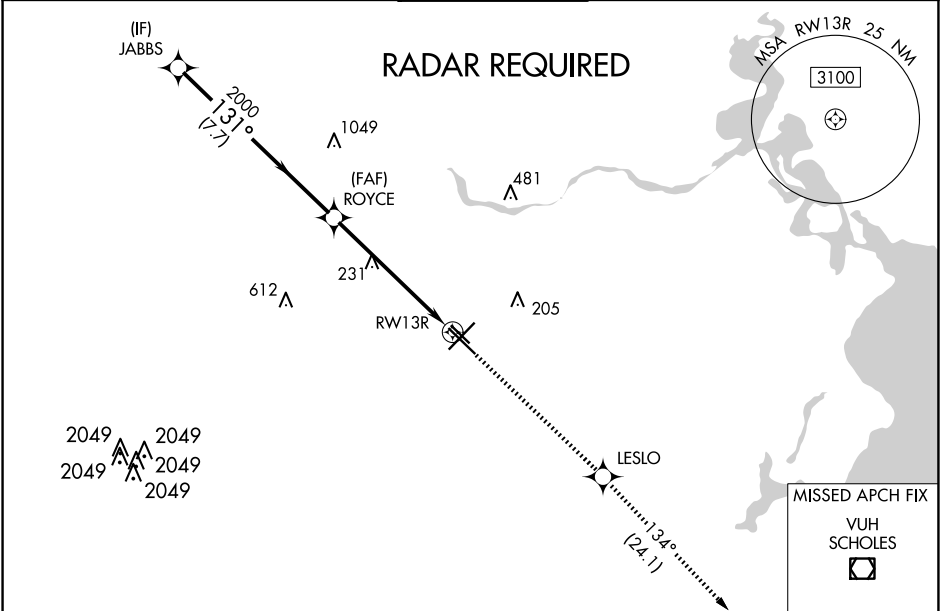

ELEV 46		TDZE 46	
---------	--	---------	--

JABBS ROYCE LESLO VUH


2000 2000 tr 134°

GP 3.00° TCH 49

7.7 NM 4.5 NM 1.4 NM

*1.4 NM to RWY 13R *LNAV only

CATEGORY	A	B	C	D	E
LPV DA	330/40 284 (300-¾)				
LNAV/VNAV DA	475/50 429 (500-1)				
LNAV MDA	540/40 494 (500-¾)	540/50 494 (500-1)	540/60 494 (500-1¼)		
CIRCLING	540-1 494 (500-1)	740-2¼ 694 (700-2¼)	860-3 814 (900-3)		



REIL Rwy 31L
MIRL Rwy 13L-31R
HIRL Rwy 4-22 and 13R-31L
TDZ/CL Rwy 4, 13R and 31L

SC-5, 04 SEP 2025 to 02 OCT 2025

SC-5, 04 SEP 2025 to 02 OCT 2025