
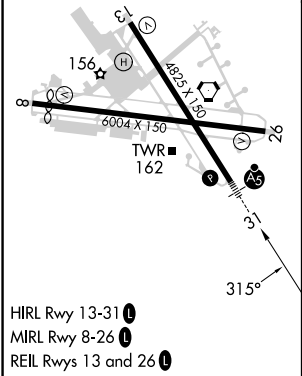


LOC I-SNS	APP CRS	Rwy Idg	4825
108.5	315°	TDZE	82
		Apt Elev	84

LOC RWY 31
SALINAS MUNI (SNS)

DME required.	MALSR	MISSED APPROACH: Climb to 800 then climbing left turn to 3000 on SNS VORTAC R-275 to MARNA/SNS 10.9 DME and hold, continue climb-in-hold to 3000.
▼ DME from SNS VORTAC. DME use requires simultaneous reception of I-SNS and SNS DME. Circling NA for Cats C and D northeast of Rwy 13 and north of Rwy 26. For inop ALS, increase S-LOC-31 visibility Cats C and D to RVR 5000.	AS	

ATIS	NORCAL APP CON	SALINAS TOWER ★	GND CON	UNICOM
124.85	133.0 251.15	119.525 (CTAF) 239.3	121.7	123.0

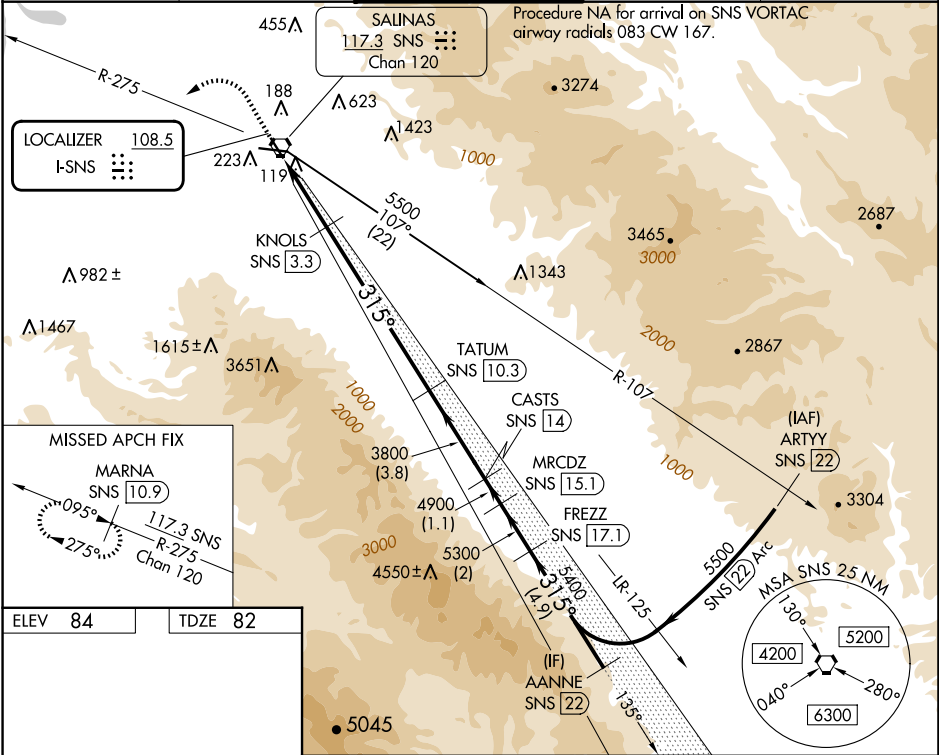

800	3000	MARNA SNS 10.9	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 59).	FREZZ SNS 17.1	AANNE SNS 22
SNS R-275					
SNS 0.4	SNS 1.3	KNOLS SNS 3.3	TATUM SNS 10.3	CASTS SNS 14	MRCDZ SNS 15.1
1220	3800	4900	5300	5400	5500
0.9	2.1 NM	6.9 NM	1.1 NM	2 NM	4.9 NM
CATEGORY	A	B	C	D	
S-LOC 31	420/24	338 (400-½)	420/40	338 (400-¾)	
CIRCLING	540-1	456 (500-1)	800-2	1740-3	
			716 (800-2)	1656 (1700-3)	