

ILS or LOC RWY 28

|               |          |              |
|---------------|----------|--------------|
| LOC/DME I-SVN | APCH CRS | Rwy Idg      |
| 109.5         | 276°     | 11,393       |
| Chan 32       |          | TDZE 41      |
|               |          | Arpt Elev 41 |


[USA]

HUNTER AAF (KSVN)


|                                                                                                                                                                                                                                      |        |                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------|
| DME required                                                                                                                                                                                                                         | ALSF-1 | MISSED APPROACH: Climb to 1000, then climbing left turn to 2300 heading 050° and on SVN VOR/DME R-095 to ESPEY/ SVN 7.7 DME and hold. |
| ▼ * When ALS inop, increase RVR to 40, vis to ¾ mile.<br>** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1¼ miles.<br>*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1½ miles. |        |                                                                                                                                       |

|                           |                                     |                                   |                            |
|---------------------------|-------------------------------------|-----------------------------------|----------------------------|
| ATIS ★<br>127.525 323.125 | SAVANNAH APP CON ★<br>120.4 353.775 | TOWER ★<br>124.975 (CTAF) 279.575 | GND CON ★<br>121.8 291.675 |
|---------------------------|-------------------------------------|-----------------------------------|----------------------------|


\*\*\*\* Circling not authorized for CAT CD N of Rwy 10-28.

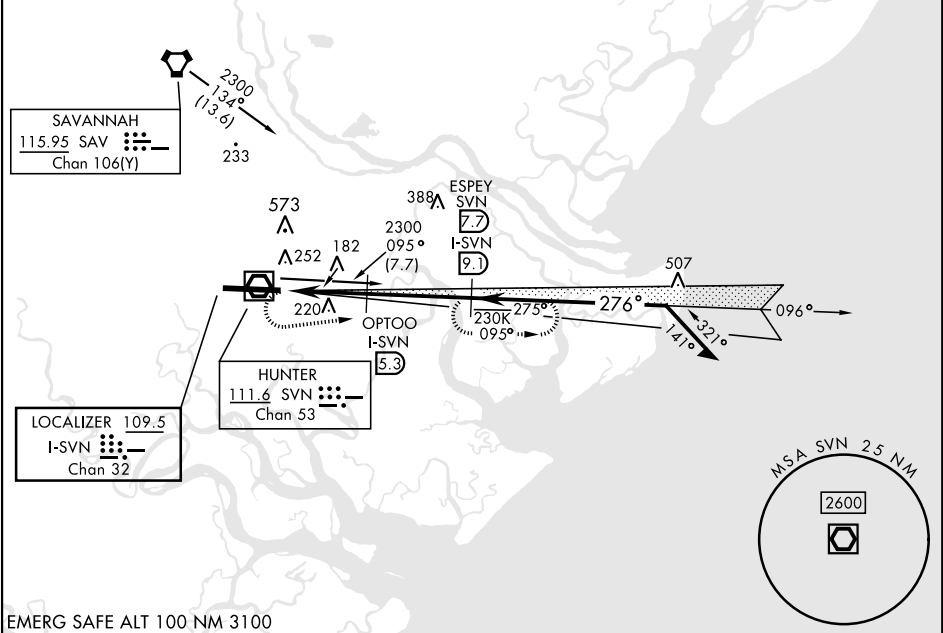

EMERG SAFE ALT 100 NM 3100

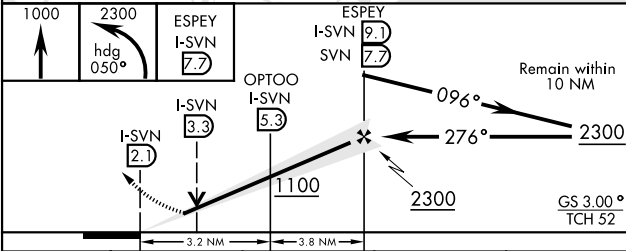

|         |         |
|---------|---------|
| ELEV 41 | TDZE 41 |
|---------|---------|



| CATEGORY                                   | A                  | B                   | C            | D |
|--------------------------------------------|--------------------|---------------------|--------------|---|
| S-ILS 28*                                  | 241/24             | 200                 | (200-½)      |   |
| S-LOC 28**                                 | 480/24 439 (500-½) | 480/40 439 (500-¾)  | 600-1½ 620-2 |   |
| ****<br>CIRCLING                           | 600-1 559 (600-1)  | 559 (600-1½)        | 579 (600-2)  |   |
| LOCAL ALTIMETER, WITHOUT LAST STEPDOWN FIX |                    |                     |              |   |
| S-LOC 28***                                | 600/24 559 (600-½) | 600/60 559 (600-1½) | 600-1½ 620-2 |   |
| ****<br>CIRCLING                           | 600-1 559 (600-1)  | 559 (600-1½)        | 579 (600-2)  |   |

REIL Rwy 10 0  
HIRL Rwy 10-28 0

| FAF to MAP 7 NM |      |      |      |           |
|-----------------|------|------|------|-----------|
| Knots           | 60   | 90   | 120  | 150 180   |
| Min:Sec         | 7:00 | 4:40 | 3:30 | 2:48 2:20 |

ILS or LOC RWY 28