



WAAS CH 53611 W22A	APP CRS 223°	Rwy Ldg 4974 TDZE 23 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 22
VERO BEACH RGNL (VRB)



⚠ Circling to Rwy 30R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 363 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 567 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV Cat C/D visibility ⅓ SM and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Fort Pierce altimeter setting. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2000 direct
JINSO and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER★ 126.3 (CTAF) 0	GND CON 127.45	CLNC DEL 134.975	UNICOM 122.95
------------------------	--	--	--------------------------	----------------------------	-------------------------

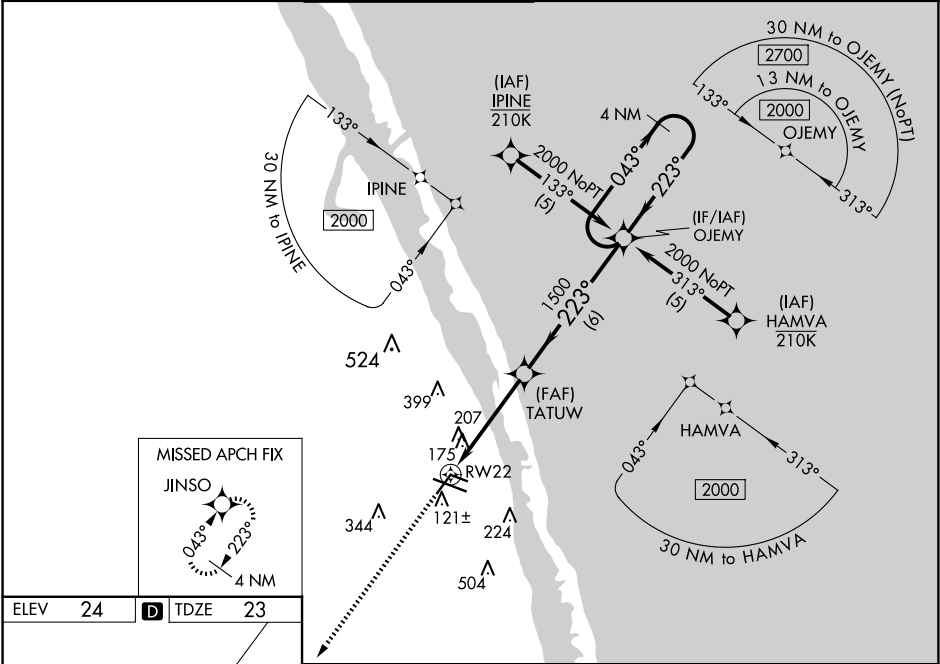

ELEV 24	D	TDZE 23
---------	----------	---------

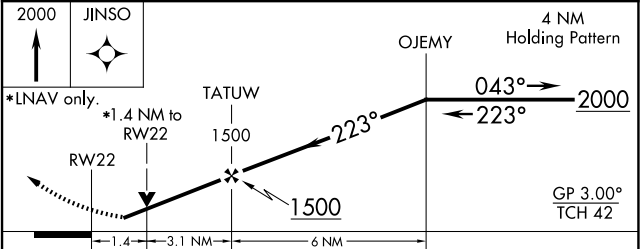

CATEGORY	A	B	C	D
LPV DA	340-1 317 (400-1)			
LNAV/VNAV DA	544-1¾ 521 (600-1¾)			
LNAV MDA	520-1 497 (500-1)	520-1¾ 497 (500-1¾)		
CIRCLING	560-1 536 (600-1)	660-1¾ 636 (700-1¾)	820-2½ 796 (800-2½)	

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025