


LOC/DME I-HTS 109.9 Chan 36	APP CRS 118°	Rwy Ldg TDZE Apt Elev 6516 828 828
--	------------------------	--

ILS or LOC RWY 12
TRI-STATE/MILTON J FERGUSON FLD (HTS)

DME required. RADAR required for procedure entry.	MALSRL 	MISSED APPROACH: Climb to 2800 then climbing left turn to 4000 on heading 005° and HVQ VOR/DME R-284 to MILLK/HVQ VOR/DME 34 DME and hold, continue to climb-in-hold to 4000.
For inop ALS, increase S-LOC 12 Cats C and D visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 125.2	HUNTINGTON APP CON 119.75 270.1	HUNTINGTON TOWER 118.5 270.1	GND CON 121.9	CLNC DEL 118.05
----------------------	---	--	-------------------------	---------------------------

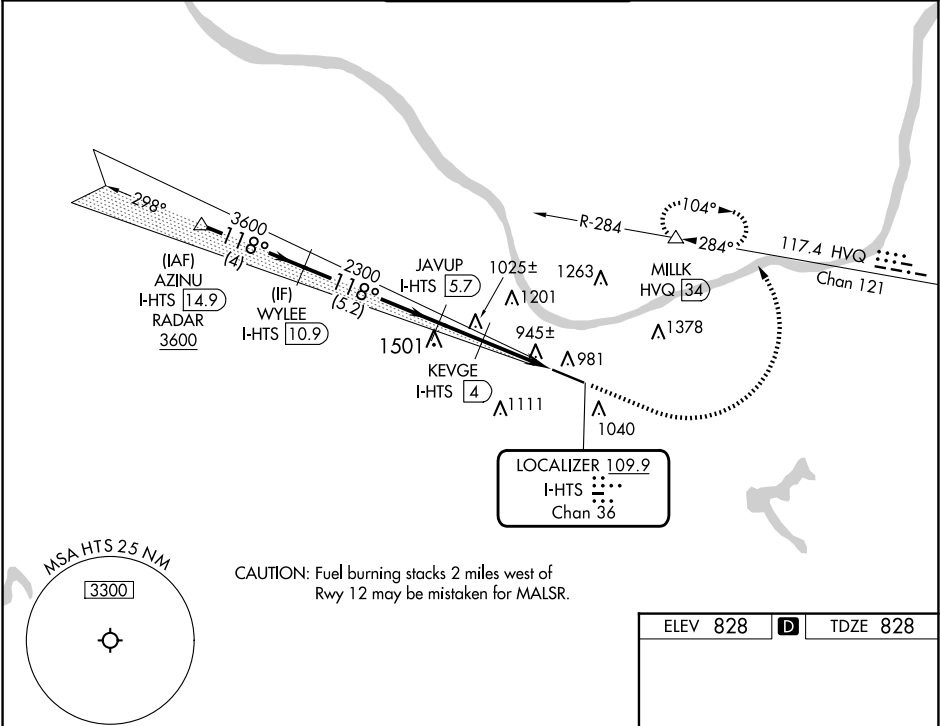

AZINU I-HTS 14.9 RADAR	WYLEE I-HTS 10.9	JAVUP I-HTS 5.7	2800 4000 hdg 005°	HVQ R-284	MILLK △
3600 GS 3.00° TCH 56	2300	1760	2300 1760	1760	1760
4 NM	5.2 NM	1.7 NM	1.8 NM	1 NM	
CATEGORY	A	B	C	D	
S-ILS 12*	1028/24 200 (200-½)				
S-LOC 12	1200/24	372 (400-½)	1200/35	372 (400-⅝)	
CIRCLING	1300-1 472 (500-1)	1380-1 552 (600-1)	1520-2 692 (700-2)	1740-3 912 (1000-2)	

