


WAAS CH 45699 W12A	APP CRS 118°	Rwy Ldg TDZE 828 Apt Elev 828
--	------------------------	---

RNAV (GPS) RWY 12

TRI-STATE/MILTON J FERGUSON FLD (HTS)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 1700 then climbing left turn to 4000 direct CROUP and hold, continue to climb-in-hold to 4000.
 	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA.			
ATIS 125.2	HUNTINGTON APP CON 119.75 270.1	HUNTINGTON TOWER 118.5 270.1	GND CON 121.9	CLNC DEL 118.05

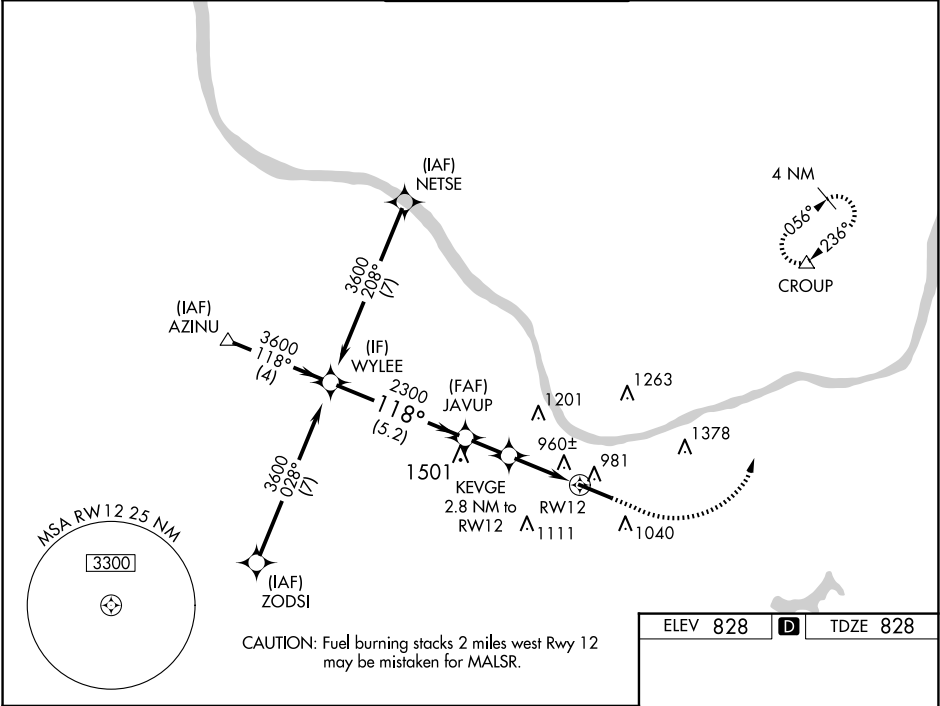

GP 3.00° TCH 56				
5.2 NM		1.7 NM	1.7 NM	1.1 NM
CATEGORY	A	B	C	D
LPV DA *	1028/24		200 (200-½)	
LNAV/ VNAV DA	1121/24		293 (300-½)	
LNAV MDA	1220/24	392 (400-½)	1220/35	392 (400-¾)
CIRCLING	1300-1 472 (500-1)	1380-1 552 (600-1)	1520-2 692 (700-2)	1740-3 912 (1000-3)
REIL Rwy 30 HIRL Rwy 12-30				