

APP CRS	Rwy Ldg	9800
287°	TDZE	2
	Apt Elev	4

RNAV (RNP) Z RWY 29
LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

T


For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS Required.

MALSR




MISSED APPROACH: Climb to 3000 on track 286° to LETSE and on track 291° to RQR VOR/DME and hold.

D-ATIS 127.55	NEW ORLEANS APP CON WEST 125.5 350.35 EAST 133.15 290.3	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525	CLNC DEL 120.925	CPDLC
-------------------------	---	---	---------------------------------	----------------------------	-------

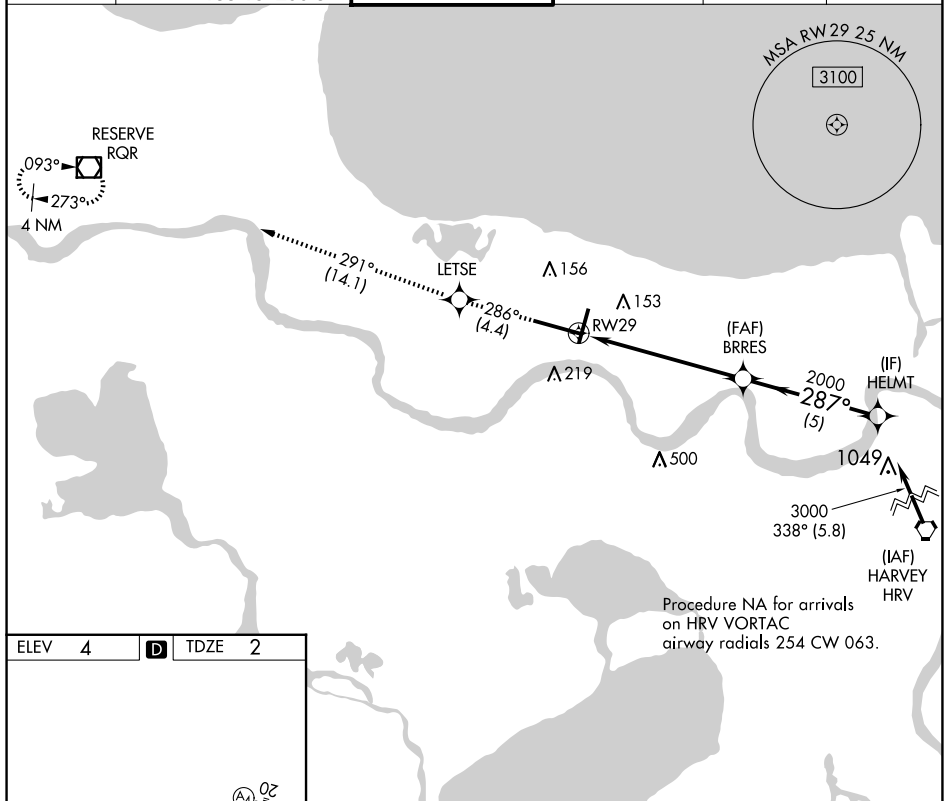

ELEV	4	D	TDZE	2
------	---	----------	------	---



3000 ↑	fr 286°	LETSE ✦	fr 291°	RQR ◻	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).
					HELMT 3000 BRRES 2000 287° 2000 GP 3.00° TCH 53
CATEGORY	A		B	C	D
RNP 0.30 DA	382/40 380 (400-3/4)				
AUTHORIZATION REQUIRED					