

APP CRS
186°

Rwy Ldg
TDZE
868

Apt Elev
896

RNAV (RNP) Z RWY 18R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From RANGL or TARZI: RF


ALSF-2

MISSED APPROACH: Climb to 3000 direct BEPEE and on track 269° to AVIEW and hold.

For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2

D-ATIS		CINCINNATI APP CON		CINCINNATI TOWER		GND CON	CLNC DEL	CPDLC
ARR	DEP	119.7 363.15	(090°-269°)	118.975 360.85	(RWY 18L/36R)	121.7	127.175	
134.375	135.3	123.875 363.15	(270°-089°)	118.3	(RWYS 18C/36C, 09/27)			
				133.325	(RWY 18R/36L)			

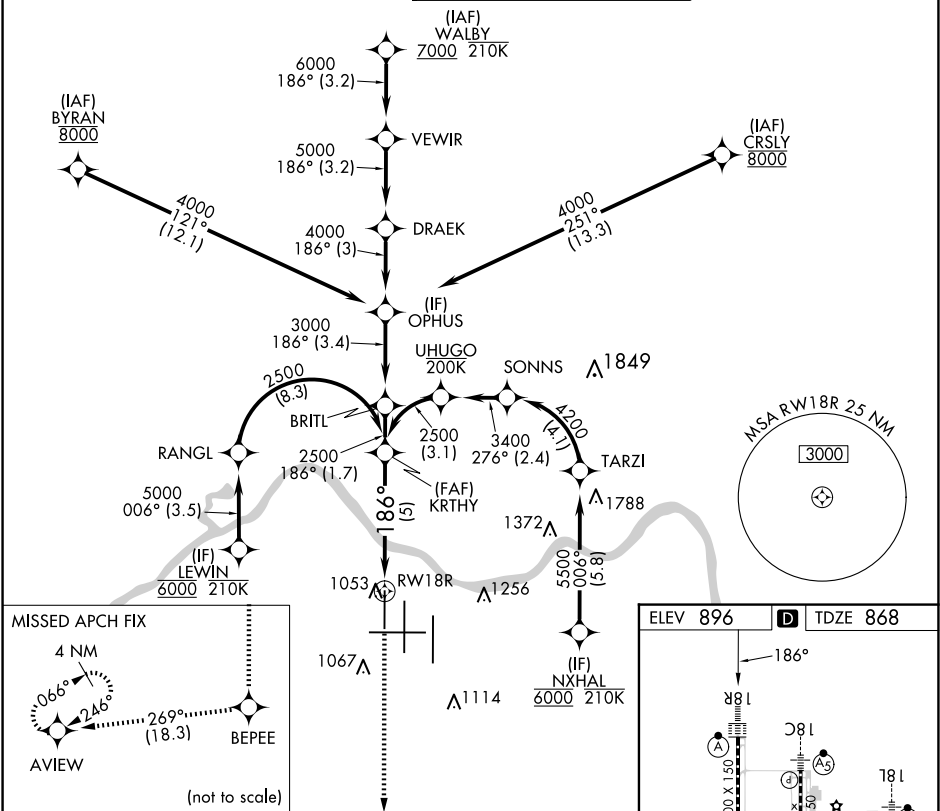

3000 BEPEE tr 269° AVIEW

See planview for multiple IF locations.

KRTHY 2500

RWY 18R 186° 2500

GP 3.00° TCH 58

CATEGORY	A	B	C	D
RNP 0.30 DA		1238/35	370 (400-%)	

ELEV 896

TDZE 868

HIRL all Rwys

TDZ/CL all Rwys except 27

COVINGTON, KENTUCKY

Amdt 1 12JUN25

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

39°03'N-84°40'W

RNAV (RNP) Z RWY 18R