

WAAS CH 48804 W24A	APP CRS 236°	Rwy Idg TDZE Apt Elev	5504 63 67
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24

MARTHA'S VINEYARD (MVY)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility to RVR 5200; increase LNAV Cats C/D visibility to RVR 5000; increase Circling visibility Cats C to 2 miles and D to 2 ½ mile. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile. For inop MALSR using Hyannis altimeter setting, increase LPV all Cats visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ mile and increase LNAV Cats C/D visibility to 1½ mile. VDP and Baro-VNAV NA when using Hyannis altimeter setting. Night landing: Rwy 15 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hyannis altimeter setting.

MALSR

MISSED APPROACH:
Climb to 500 then
climbing left turn to
2500 direct CLAMY
and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF)	GND CON 124.35	CLNC DEL 124.35	CLNC DEL 119.7 (When twr closed)	UNICOM 122.95
-----------------------	---------------------------------	---	--------------------------	---------------------------	---	-------------------------

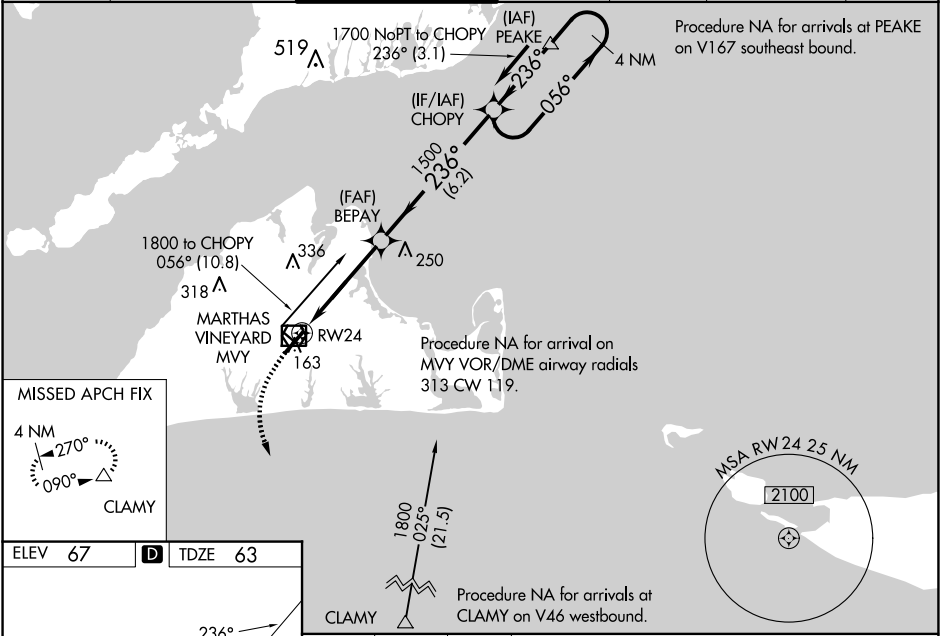

ELEV 67

TDZE 63

500

2500

CLAMY

*LNAV only

*1.2 NM to RW24

BEPAY

CHOPY

1500

1500

236°

056°

236°

1700

GP 3.00°

TCH 51

1.2 NM

3.2 NM

6.2 NM

CATEGORY

A

B

C

D

LPV DA

** 263/24

200 (200-½)

LNAV/ VNAV DA

480/47

417 (500-1)

LNAV MDA

500/24

437 (500-½)

500/40

437 (500-¾)

CIRCLING

500-1

540-1

700-1¾

780-2¼

433 (500-1)

473 (500-1)

633 (700-1¾)

713 (800-2¼)

VINEYARD HAVEN, MASSACHUSETTS

Amdt 2E 07DEC17

41°24'N-70°37'W

MARTHA'S VINEYARD (MVY)

RNAV (GPS) RWY 24