



WAAS CH 40217 W35A	APP CRS 355°	Rwy Ldg TDZE 1913 Apt Elev 1922
--	------------------------	---

RNAV (GPS) RWY 35L
CLINTON/SHERMAN (CSM)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA east of Rwy 17R-35L. DME/DME RNP-0.3 NA.			MISSED APPROACH: Climb to 4100 direct JETVE and hold.	
ASOS 118.45	FORT WORTH CENTER 128.4 269.37	CLINTON/SHERMAN TOWER★ 119.6 (CTAF) 256.9	GND CON 121.7 239.0	UNICOM 122.95

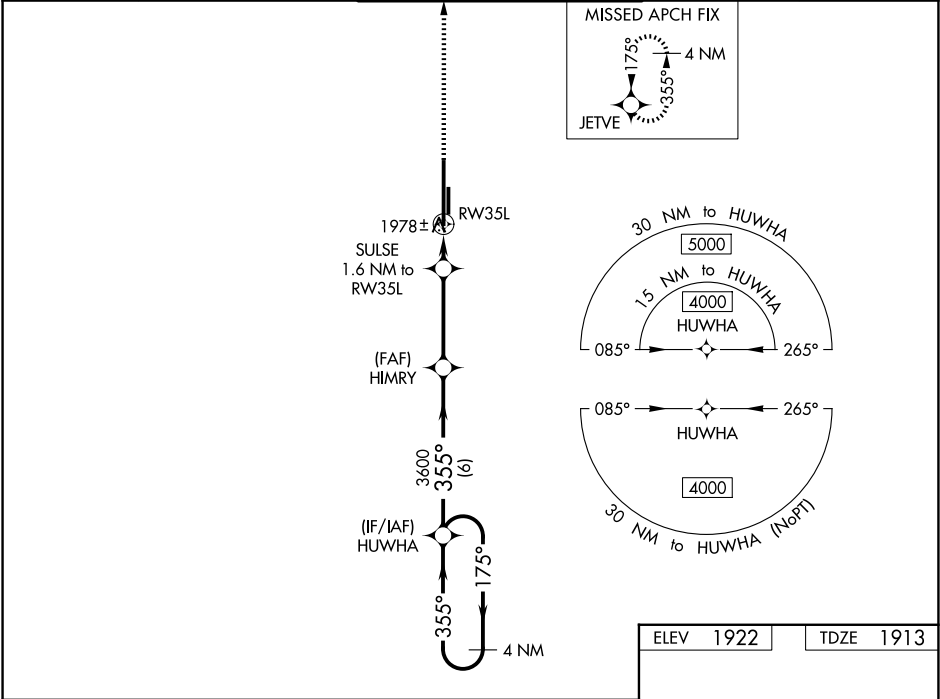

4 NM Holding Pattern HUWHA HIMRY SULSE 1.6 NM to RW35L 4100 JETVE GP 3.00° TCH 50 4000 175° 355° 355° 3600 *2460 *0.9 NM to RW35L RW35L *LNAV only. 6 NM 3.5 NM 0.7 NM 0.9 NM					
CATEGORY	A	B	C	D	E
LPV DA	2113-¾ 200 (200-¾)				
LNAV/VNAV DA	2163-¾ 250 (300-¾)				
LNAV MDA	2240-1 327 (400-1)				
CIRCLING	2340-1 418 (500-1)	2380-1 458 (500-1)	2380-1½ 458 (500-1½)	2620-2¼ 698 (700-2¼)	2620-2½ 698 (700-2½)

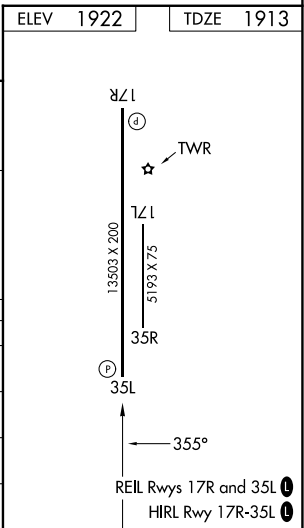

SC-1, 04 SEP 2025 to 02 OCT 2025

SC-1, 04 SEP 2025 to 02 OCT 2025