


SAN DIEGO, CALIFORNIA

LOC/DME I-NKX 111.15 Chan 48(Y)	APCH CRS 243°	Rwy Idg 8001 TDZE 477 Arpt Elev 477	24L 12,000 24R 475
---	-------------------------	--	-------------------------------------

ILS Z or LOC/DME Z RWY 24R

[USN] MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

DME and RADAR required			ALSF-1 	MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 via heading 340°. Expect radar vectors.		
▼ ** When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 ½ miles. *** CAT E circling not authorized S of Rwy 6R-24L.						
ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7	ASR/ PAR

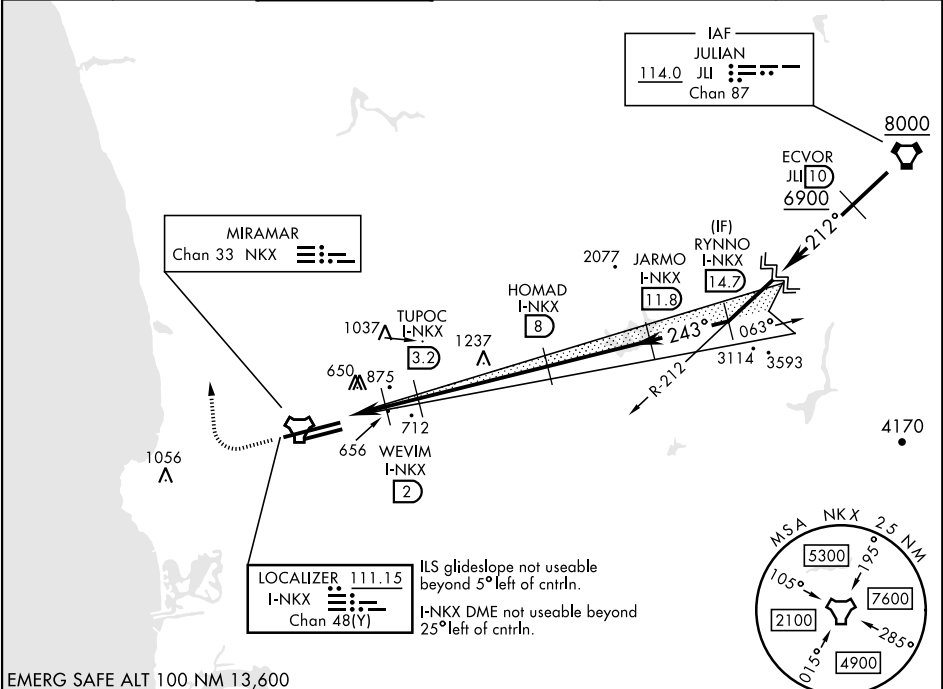

EMERG SAFE ALT 100 NM 13,600

1500 3000 ↑ hdg 340°		VCSI and descent angles not coincident.		ELEV 477 TDZE 24L 477 TDZE 24R 475	
ZENPA I-NKX 0.6		WEVIM I-NKX 2		TUPOC I-NKX 3.2	
HOMAD I-NKX 8		JARMO I-NKX 11.8		RYNNO I-NKX 14.7	
2998		243°		4700	
1200		1600		3000	
GS 3.00°		TCH 53		243°	
0.4		1.4 NM		1.2 NM	
A		B		C	
S-ILS 24R*		675 - ½		200	
S-LOC/DME 24R**		920- ½ 445 (500-½)		920-¾ 445 (500-¾)	
SIDESTEP 24L		920-1 443 (500-1)		920-1½ 443 (500-1½)	
CIRCLING***		940-1 463 (500-1)		960-1 483 (500-1)	
		960-1½ 483 (500-1½)		1180-2¼ 703 (800-2¼)	
				1360-3 883 (900-3)	
				HIRL Rwy 6L-24R	
				HIRL Rwy 6R-24L	

SAN DIEGO, CALIFORNIA

32°52'N-117°09'W

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Amtd 1 29DEC22

ILS Z or LOC/DME Z RWY 24R

SW-3, 04 SEP 2025 to 02 OCT 2025

SW-3, 04 SEP 2025 to 02 OCT 2025