

LOC I-MMU <u>110.3</u>	APP CRS 229°	Rwy Idg TDZE Apt Elev	5998 184 187
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 23


RNAV 1-GPS or RADAR required for procedure entry.
From EMRSN: RNAV 1-GPS required.



MISSED APPROACH: Climb to 2000 on heading 229° and on SBJ VOR/DME R-070 to SBJ VOR/DME and hold.

T
A Circling to Rwy 13, 31 NA at night. Autopilot coupled approach NA below 732. For inop ALS, increase S-LOC 23 Cats C/D visibility to 1 $\frac{3}{8}$ SM.

ATIS 124.25	NEWARK APP CON 127.6 379.9	MORRISTOWN TOWER ★ 118.10 (CTAF) 353.9	GND CON 134.2	CLNC DEL 128.6
----------------	-------------------------------	---	------------------	-------------------

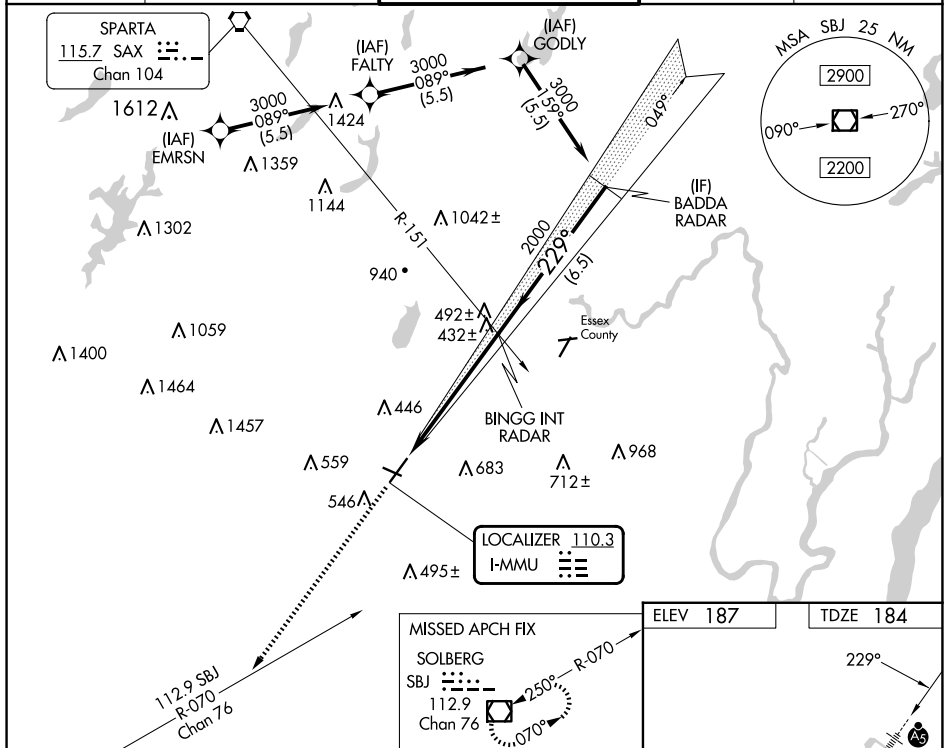

CATEGORY	A	B	C	D
S-ILS 23	384-½ 200 (200-½)			
S-LOC 23	700-½ 516 (600-½)	700-1 516 (600-1)		
C CIRCLING	860-1 673 (700-1)	900-1 713 (800-1)	1000-2½ 813 (900-2½)	1200-3 1013 (1100-3)

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50