


WAAS CH 99516 W21A	APP CRS 213°	Rwy Idg TDZE 7395 7564 Apt Elev 7590
--	------------------------	--


RNAV (GPS) RWY 21
BRYCE CANYON (BCE)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -30°C or above 54°C. When local altimeter setting not received, procedure NA. Rwy 21 helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 12300 direct OPAWO and on track 235° to CEXAT and hold.
--	---

ASOS 135.475	SALT LAKE CITY CENTER 133.6 269.25	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

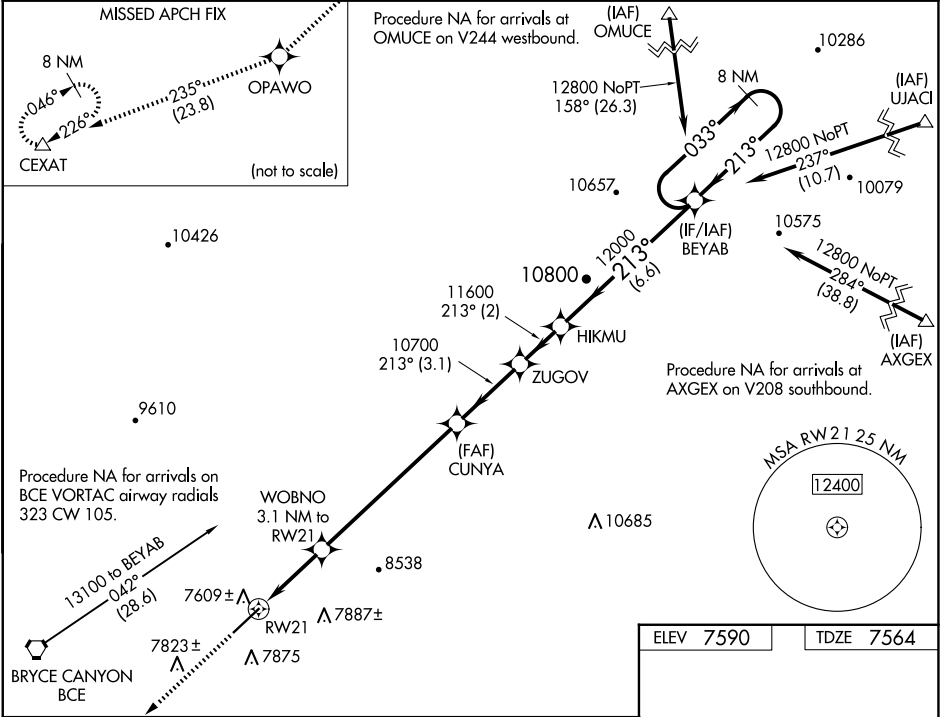

12300 ↑	OPAWO ✧	tr 235°	CEXAT △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).					8 NM Holding Pattern
				ZUGOV	HIKMU	BEYAB			
*LNAV only				WOBNO 3.1 NM to RW21	CUNYA	033° → 12800 ← 213°			
*1.5 NM to RW21				10700	11600	12000	GP 3.00° TCH 40		
RW21				8580*	10700				
1.5 1.6				6.7 NM	3.1 NM	2 NM	6.6 NM		
CATEGORY		A		B		C		D	
LPV DA	7889-1 1/8		325 (300-1 1/8)				NA		
LNAV/ VNAV	DA	8016-1 1/2		452 (500-1 1/2)				NA	
LNAV MDA	8040-1		476 (500-1)		8040-1 3/8 476 (500-1 3/8)		NA		

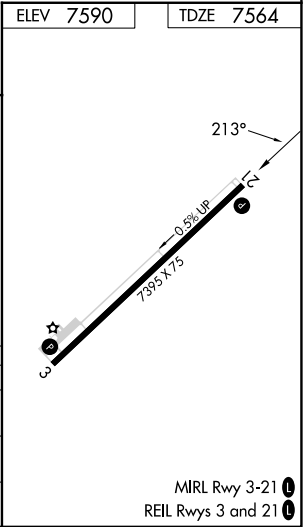

SW-4, 04 SEP 2025 to 02 OCT 2025

SW-4, 04 SEP 2025 to 02 OCT 2025