

23278

VOR/DME MFE <u>117.2</u> Chan 119	APP CRS 134°	Rwy Idg 6983 TDZE 107 Apt Elev 107
---	------------------------	---

VOR RWY 14
MC ALLEN INTL (MFE)


T Circling NA northeast of Rwy 14-32. ADF or DME required. For inop MALS R, increase 5-14 Cat C/D visibility to 1 3/8 mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and 5-14 Cat C/D and Circling Cat C visibility 1/8 mile. VDP NA when using Weslaco altimeter setting.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER ★ 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	-------------------------



ADF or DME REQUIRED

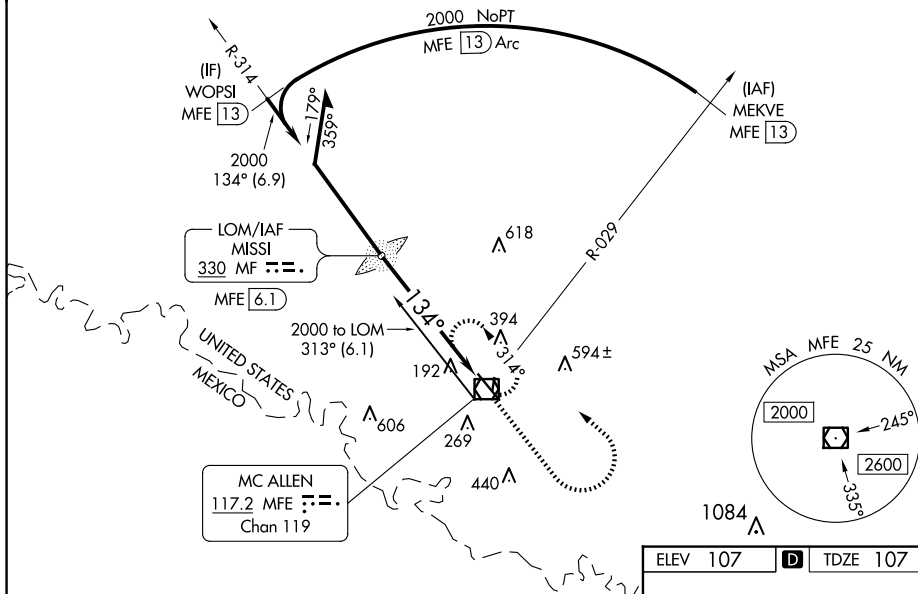

SC-3, 04 SEP 2025 to 02 OCT 2025

Remain
within 10 NM

MISSI
MF LOM
MFE 6.1

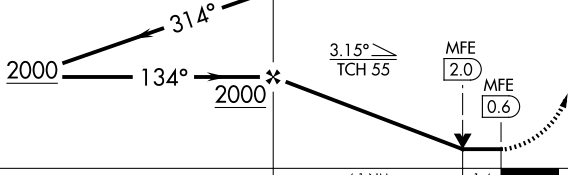

CATEGORY	A	B	C	D	REIL Rwy 32 HIRL Rwy 14-32 MIRL Rwy 18-36 FAO to MAP 5.5 NM					
S-14	620-1/2 513 (600-1/2)		620-1 513 (600-1)							
C CIRCLING	620-1 513 (600-1)		620-1/2 513 (600-1/2) 800-2 1/4 693 (700-2 1/4)		Knots	60	90	120	150	180
					Min:Sec	5:30	3:40	2:45	2:12	1:50

MC ALLEN, TEXAS
Amdt 16 10DEC15

26°11'N-98°14'W

MC ALLEN INTL (MFE)
VOR RWY 14

SC-3, 04 SEP 2025 to 02 OCT 2025