



WAAS CH 97730 W14A	APP CRS 139°	Rwy Idg TDZE 200 Apt Elev 200
--	------------------------	---

RNAV (GPS) RWY 14
BOIRE FLD (ASH)

RNP APCH - GPS.			MALSRR 	MISSED APPROACH: Climb to 800 then climbing left turn to 2000 direct PELAN and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1% SM and LNAV Cat C/D visibility to 1% SM.				
ATIS 125.1	BOSTON APP CON 124.9 269.075	NASHUA TOWER ★ 133.2 (CTAF) 0	GND CON 121.8	CLNC DEL 121.8

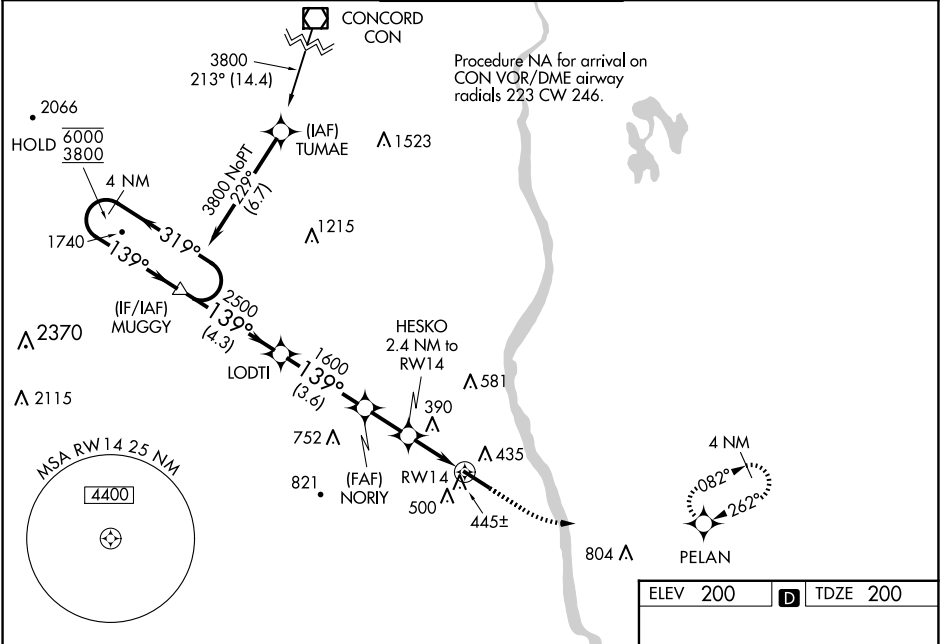

4 NM Holding Pattern		MUGGY	LODTI	NORIY	HESKO	PELAN
6000 ← 319°		139° →	2500	1600	1000	800 2000
GP 3.00° TCH 47		139°	1600	1000	1.4 NM to RW14	1.4 NM to RW14
		4.3 NM	3.6 NM	1.9 NM	1 NM	1.4 NM
CATEGORY	A	B	C	D		
LPV DA	400-½		200 (200-½)			
LNAV/VNAV DA	614-¾		414 (500-¾)			
LNAV MDA	700-½	500 (500-½)	700-1 500 (500-1)			
CIRCLING	840-1 640 (700-1)	860-1 660 (700-1)	920-2 720 (800-2)	980-2½ 780 (800-2½)		

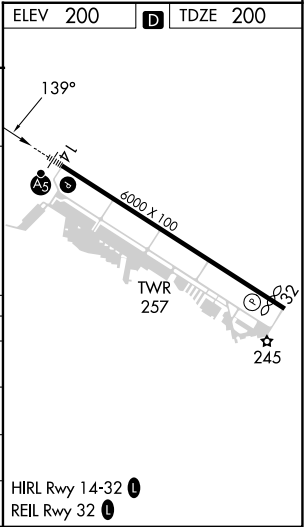

NE-1, 04 SEP 2025 to 02 OCT 2025

NE-1, 04 SEP 2025 to 02 OCT 2025