

LOC/DME I-TBN	APP CRS	Rwy Idg	5535
110.9	147°	TDZE	1158
Chan 46		Apt Elev	1160

ILS or LOC RWY 15

WAYNESVILLE-ST ROBERT RGNL FORNEY FLD (TBN)



⚠ Circling NA west of Rwy 15-33. For inop ALS increase S-LOC 15 Cats C/D visibility to 1½ SM. When local altimeter setting not received, use Rolla Nil altimeter setting and increase DA to 1427 feet; and all MDAs 80 feet, increase S-LOC 15 Cat C/D and Circling Cat C visibility ¼ SM and WOKVI fix minimums S-LOC 15 Cat C/D and Circling Cat C visibility ¼ SM. VDP NA when using Rolla Nil altimeter setting. For inop ALS when using Rolla Nil altimeter setting increase S-LOC 15 WOKVI fix minimums Cats C/D visibility to 1¼ SM. Inop table does not apply to S-ILS 15, S-LOC 15 Cat A/B, and WOKVI fix minimums S-LOC 15.

MALSR



MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 on heading 298° and TBN VOR R-327 to PIMEW INT/I-TBN 13 DME and hold.

D-ATIS	KANSAS CITY CENTER	FORNEY TOWER★	GND CON
118.7 229.4	128.35 284.675	125.4 (CTAF) 0 268.7	123.75 256.8

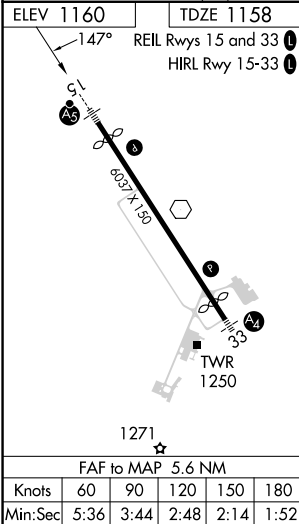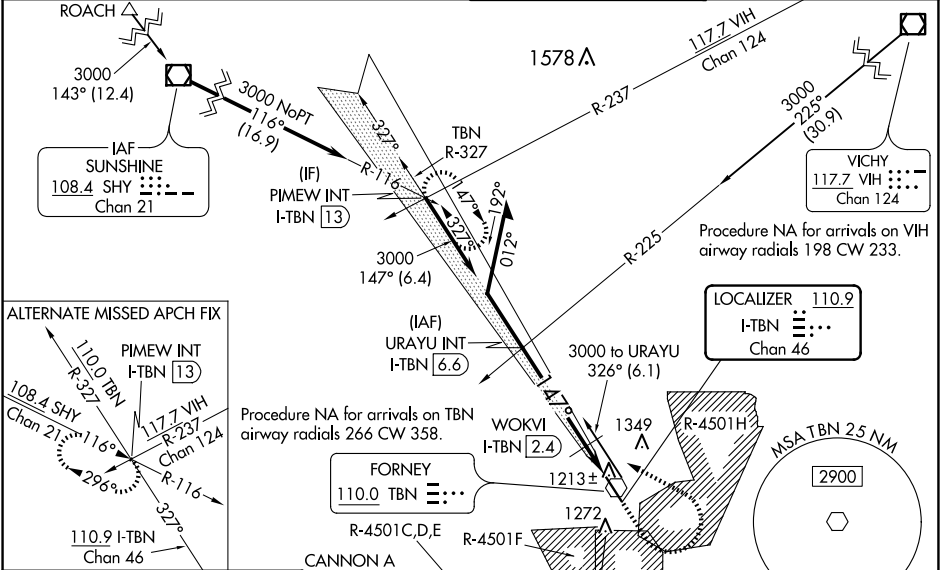

#1740 when using Rolla Nil altimeter setting. Remain within 10 NM				
URAYU INT I-TBN 6.6				
3000 147° 3000				
GS 3.00° TCH 47				
WOKVI I-TBN 2.4 *I-TBN 1.9 I-TBN 1				
*LOC only.				
#1660				
4.2 NM 0.5 NM 0.9 NM				
CATEGORY	A	B	C	D
S-ILS 15		1358-1	200 (200-1)	
S-LOC 15		1660-1	502 (500-1)	
CIRCLING	1660-1	500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)
WOKVI FIX MINIMUMS				
S-LOC 15		1500-1	342 (400-1)	
CIRCLING	1580-1 420 (500-1)	1660-1 500 (500-1)	1660-1½ 500 (500-1½)	1720-2 560 (600-2)