


WAAS CH 40113 W08B	APP CRS 087°	Rwy Ldg TDZE 794 Apt Elev 794
--	------------------------	---

RNAV (GPS) RWY 8R

GERALD R FORD INTL (G.R.R)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR 	MISSED APPROACH: Climb to 2700 direct CAVUS and on track 085° to SARAN and hold.	
ATIS 118.725	GREAT LAKES APP CON ★ 128.4 257.6	GRAND RAPIDS TOWER★ 135.65 (CTAF) 339.8	GND CON 121.8	CLNC DEL 119.3	UNICOM 122.95

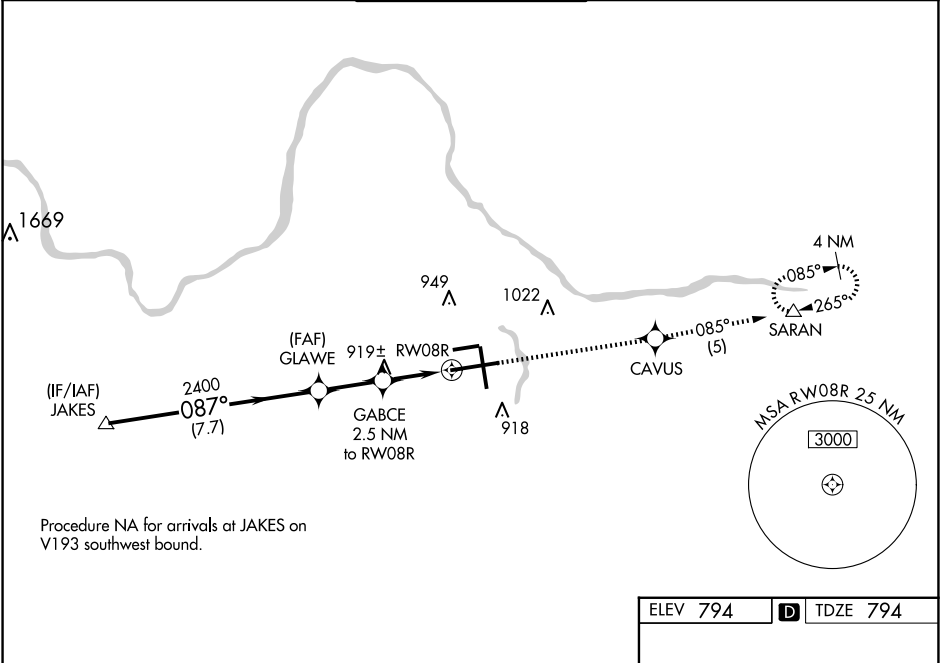

Procedure NA for arrivals at JAKES on V193 southwest bound.

JAKES 2700 087° GLAWE 2400 1640 7.7 NM 2.3 NM 1.4 NM 1.1 NM RW08R				2700	CAVUS	tr 085°	SARAN
GP 3.00° TCH 51				*LNAV only.			
GABCE 2.5 NM to RW08R				*1.1 NM to RW08R			
CATEGORY				A	B	C	D
LPV DA **				994/24 200 (200-½)			
LNAV/ VNAV DA				1297/50 503 (600-1)			
LNAV MDA				1180/24 386 (400-½)		1180/35 386 (400-¾)	1180/50 386 (400-1)
CIRCLING				1260-1 466 (500-1)		1340-1½ 546 (600-1½)	1360-2 566 (600-2)

