


WAAS CH 50521 W31A	APP CRS 317°	Rwy Ldg TDZE Apt Elev	6094 1285 1306
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31


CHAN GURNEY MUNI (YKN)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3500 direct YOTUS and hold, continue climb-in-hold to 3500.
Circling NA east of Rwy 20 and northeast of Rwy 31. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS increase LPV and LNAV/VNAV all Cats visibility to ¾ SM and LNAV visibility all Cats to 1 SM.		

AWOS-3PT 119.05	MINNEAPOLIS CENTER 125.025 235.625	UNICOM 122.8 (CTAF)
---------------------------	--	-------------------------------

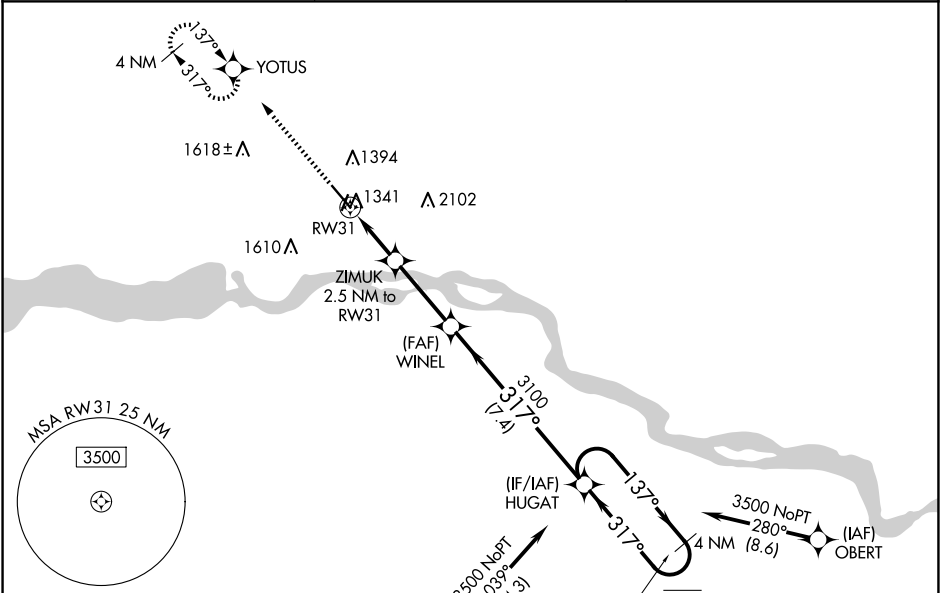

ELEV 1306	TDZE 1285
-----------	-----------

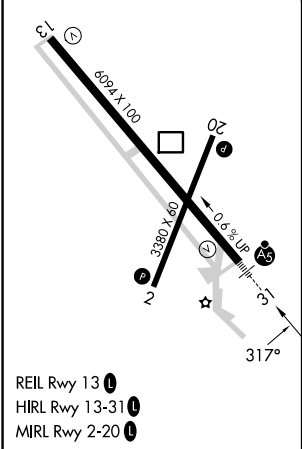

3500

↑

YOTUS

✧

HUGAT

4 NM Holding Pattern

ZIMUK

2.5 NM to RW31

WINEL

3100

137° → 6000

← 317° 3500

0.9 NM to RW31

2100

317°

3100

GP 3.00°

TCH 51

0.9 NM

1.6 NM

3.1 NM

7.4 NM

CATEGORY	A	B	C	D
LPV DA	1485-½ 200 (200-½)			
LNAV/VNAV DA	1535-½ 250 (300-½)			
LNAV MDA	1600-½ 315 (300-½)			
CIRCLING	1760-1 454 (500-1)	1780-1 474 (500-1)	1980-2 674 (700-2)	1980-2¼ 674 (700-2¼)