

WAAS CH 93824 W04A	APP CRS 043°	Rwy Ldg TDZE Apt Elev	6000 253 257
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

DOUGLAS MUNI (DQH)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct PAJTO and hold, continue climb-in-hold to 3000.

AWOS-3 119.075	JACKSONVILLE CENTER 127.575 269.025	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

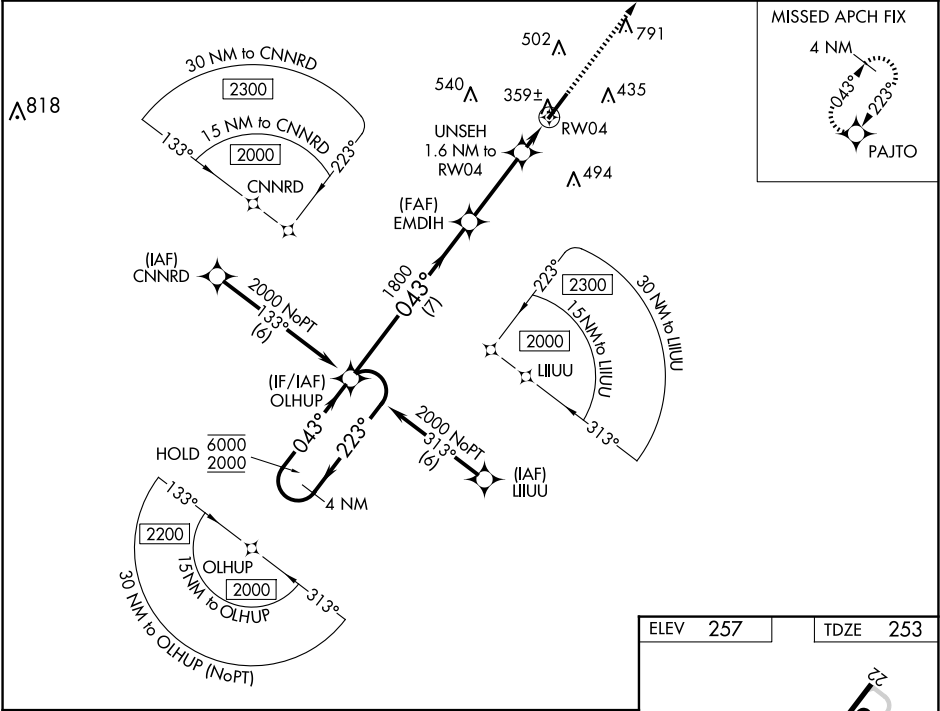

4 NM Holding Pattern		OLHUP	EMDIH	UNSEH	1.6 NM to RWY 4	1 NM to RWY 4	RWY 4
6000 ← 223°		2000 → 043°	1800	800			
GP 3.00°		TCH 51					
7 NM		3.1 NM	0.6 NM	1 NM			
CATEGORY	A	B	C	D			
LPV DA	453-½		200 (200-½)				
LNAV/VNAV DA	540-½		287 (300-½)				
LNAV MDA	620-½ 367 (400-½)		620-⅝ 367 (400-⅝)				
◻ CIRCLING	720-1 463 (500-1)		820-1 563 (600-1)		960-2 703 (800-2)		960-2¼ 703 (800-2¼)