

WAAS CH 78032 W18A	APP CRS 181°	Rwy Idg 4098 TDZE 573 Apt Elev 573
--	------------------------	---

RNAV (GPS) RWY 18


SALEM-LECKRONE (SLO)

⚠

Baro-VNAV NA when using Centralia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 801 feet; increase LNAV/VNAV DA to 890 feet and visibility 1/8 SM; increase all MDAs 40 feet and LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D visibility 1/4 SM. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2600 direct EMLJ and hold.

AWOS-3PT 118.525	KANSAS CITY CENTER 127.7 351.825	UNICOM 122.725 (CTAF) 0
----------------------------	--	--

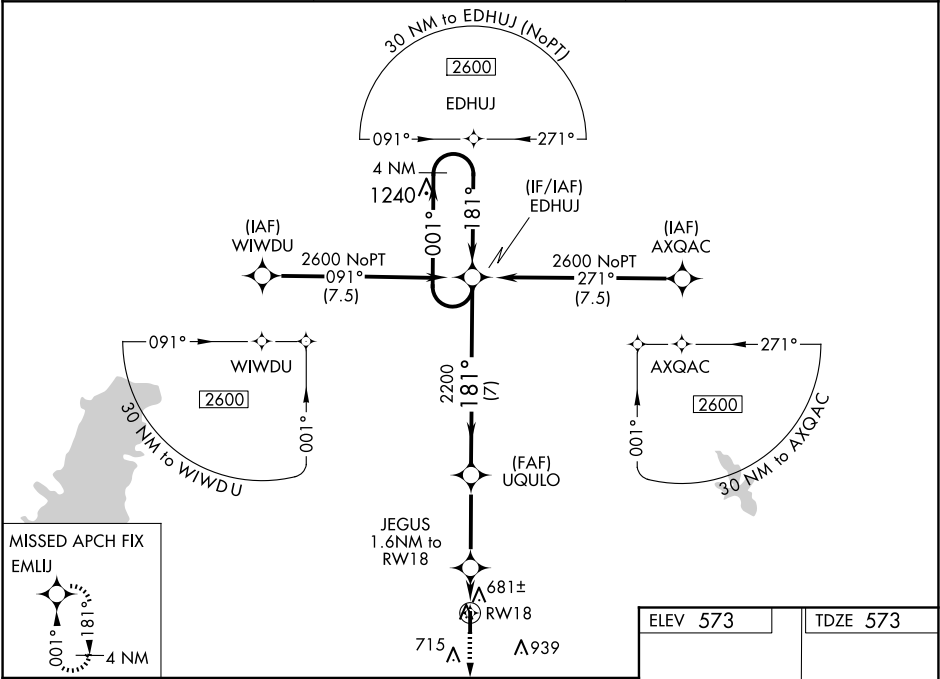

2600	EMLJ
*LNAV Only	
JEGUS 2200	EDHUJ 2200
*1.5 NM to RW18	*1.6 NM to RW18
*1120	*2200
1.5 NM	0.1 NM
3.4 NM	7 NM
4 NM Holding Pattern	
GP 3.00° TCH 40	
CATEGORY	A B C D
LPV DA	773-1 200 (200-1)
LNAV/VNAV DA	862-1 289 (300-1)
LNAV MDA	940-1 367 (400-1)
CIRCLING	1040-1 467 (500-1) 1380-2¼ 807 (900-2¼) 1380-2½ 807 (900-2½)

