| WAAS CH 63014 W29A | APP CRS 290° | Rwy ldg 5101<br>TDZE 1724<br>Apt Elev 1730 |
|---|---|---|

# RNAV (GPS) RWY 29
## SCHUYLKILL COUNTY/JOE ZERBEY (ZER)

RNP APCH - GPS.

T A NA

Circling NA to Rwys 4 and 22. Baro-VNAV NA when using Selinsgrove altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. VDP NA when using Selinsgrove altimeter setting. When local altimeter setting not received, use Selinsgrove altimeter setting: increase LPV DA to 2156 feet and visibility ½ SM; LNAV/VNAV DA to 2376 feet and visibility ¾ SM; increase all MDAs 240 feet and visibility LNAV Cats C/D ⅝ SM and Circling Cats C/D ½ SM.

MISSED APPROACH: Climb to 4000 direct IRCIT and hold.

| AWOS-3 | HARRISBURG APP CON | UNICOM |
|---|---|---|
| 127.575 | 118.25 269.45 | 123.075 (CTAF) L |

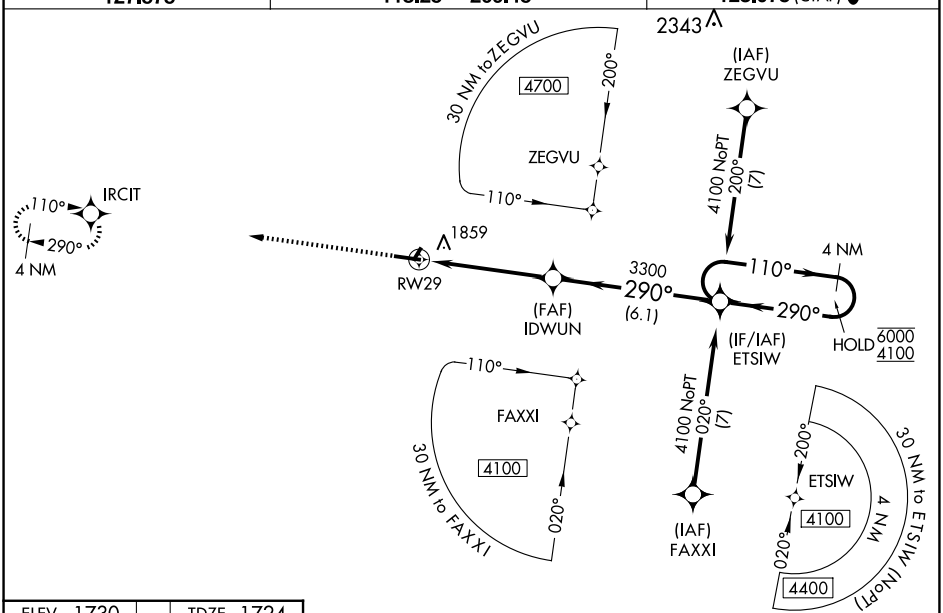


| ELEV 1730 | TDZE 1724 |
|---|---|

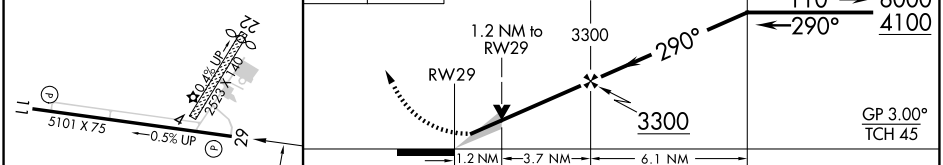


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1924-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 2144-1⅛ 420 (500-1⅛) | | | |
| LNAV MDA | 2120-1 396 (400-1) | | 2120-1⅛ 396 (400-1⅛) | |
| C CIRCLING | 2160-1 430 (500-1) | 2180-1 450 (500-1) | 2180-1½ 450 (500-1½) | 2280-2 550 (600-2) |

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L


NE-4, 04 SEP 2025 to 02 OCT 2025