

WAAS CH 49223 W10A	APP CRS 102°	Rwy Idg TDZE 974 Apt Elev 974
--	------------------------	---

RNAV (GPS) RWY 10

POLK COUNTY/CORNELIUS MOORE FLD (4A4)

RNP APCH.


▽

NA

Baro-VNAV and VDP NA when using Cartersville altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Obtain local altimeter setting on CTAF, when not received, use Cartersville altimeter setting and increase LPV DA to 1292 feet; increase LNAV/VNAV DA to 1424 feet and all visibilities ¼ SM; increase all MDA 80 feet; increase LNAV visibility Cats C and D ⅜ SM.

MISSED APPROACH: Climb to 1600 then climbing right turn to 3700 direct MAFLY and hold.

ATLANTA CENTER 124.5 270.325	UNICOM 122.8 (CTAF) 
--	---

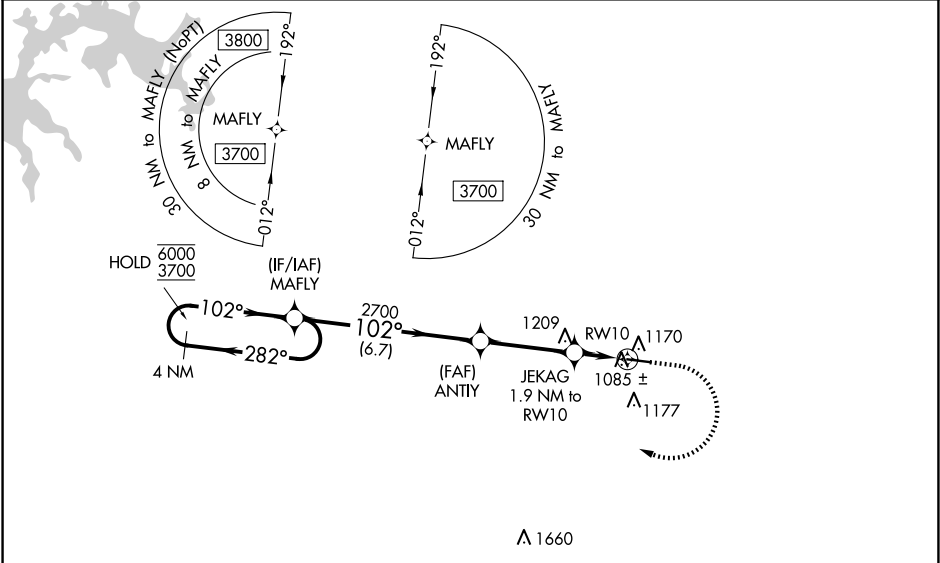

4 NM Holding Pattern

MAFLY

ANTTY

JEKAG

RW10

6000
3700

GP 3.00°
TCH 41

2700

1600

1600

3700

MAFLY

282°

102°

102°

102°

102°

102°

6.7 NM

3.4 NM

0.9 NM

1 NM

1600

3700

MAFLY

*LNAV only.

102°

5060 X 75

0.7% UP

28

CATEGORY	A	B	C	D
LPV DA		1224-1	250 (300-1)	
LNAV/VNAV DA		1356-1½	382 (400-1½)	
LNAV MDA		1340-1	366 (400-1)	

MIRL Rwy 10-28 