

WAAS CH 40321 W02A	APP CRS 022°	Rwy Ldg TDZE 772 Apt Elev 772	5375
--	------------------------	---	-------------

RNAV (GPS) RWY 2

MID-CAROLINA RGNL (RUQ)

RNP APCH - GPS.


▼

▲

Rwy 2 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3100 direct COLID
and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 0
--------------------------	---	---------------------------	-----------------------------------

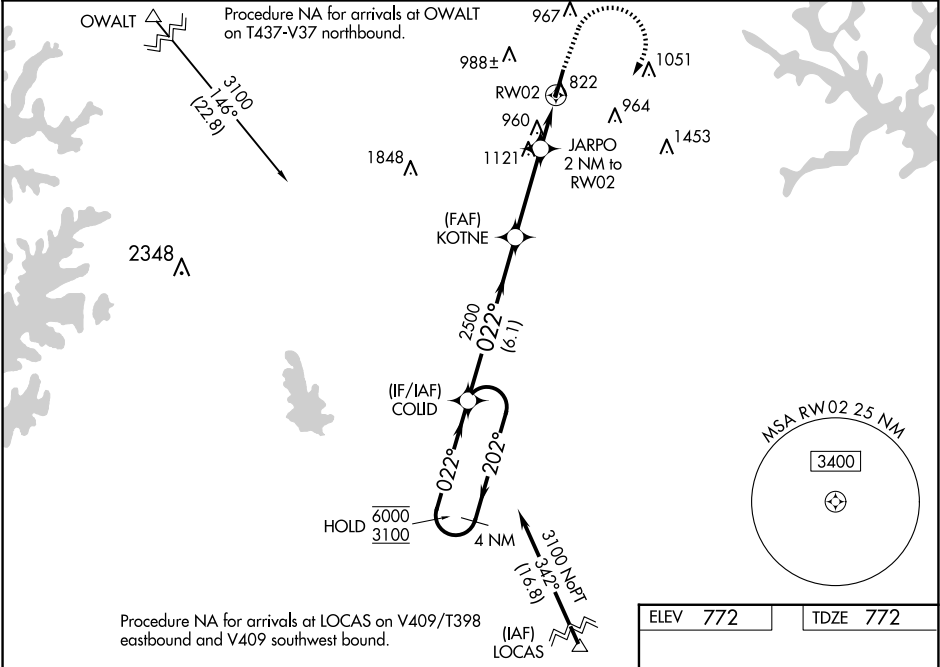

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).

4 NM Holding Pattern

GP 3.00° TCH 55

COLID

1500 3100 COLID

6000 3100

202° 022°

2500 1460

6.1 NM 3.3 NM 0.7 1.3

CATEGORY	A	B	C	D
LPV DA	1138-1 366 (400-1)			
LNAV/VNAV DA	1181-1½ 409 (500-1½)			
LNAV MDA	1220-1 448 (500-1)	1220-1¾ 448 (500-1¾)		
CIRCLING	1240-1 468 (500-1)	1260-1 488 (500-1)	1440-1¾ 668 (700-1¾)	1440-2 668 (700-2)

