


VORTAC HPW	APP CRS	Rwy Idg	5002
114.35	252°	TDZE	191
Chan 90 (Y)		Apt Elev	193

VOR RWY 23
TRI CITIES EXEC/DINWIDDIE COUNTY (PTB)

⚠ When local altimeter setting not received, use Richmond Exec/Chesterfield County altimeter setting and increase all MDA 40 feet; increase S-23 Cat C and Circling Cat C visibility 1/8 mile and YETUB fix minimums S-23 Cat C visibility 1/8 mile and Circling Cat C visibility 1/4 mile. DME required.

MISSED APPROACH: Climb to 2000 on heading 214° and HPW R-244 to FASOS/HPW 30.8 DME and hold.

AWOS-3 133.325	POTOMAC APP CON 126.75 307.2	GCO 135.075	UNICOM 122.7 (CTAF) 0
-------------------	---------------------------------	----------------	--------------------------

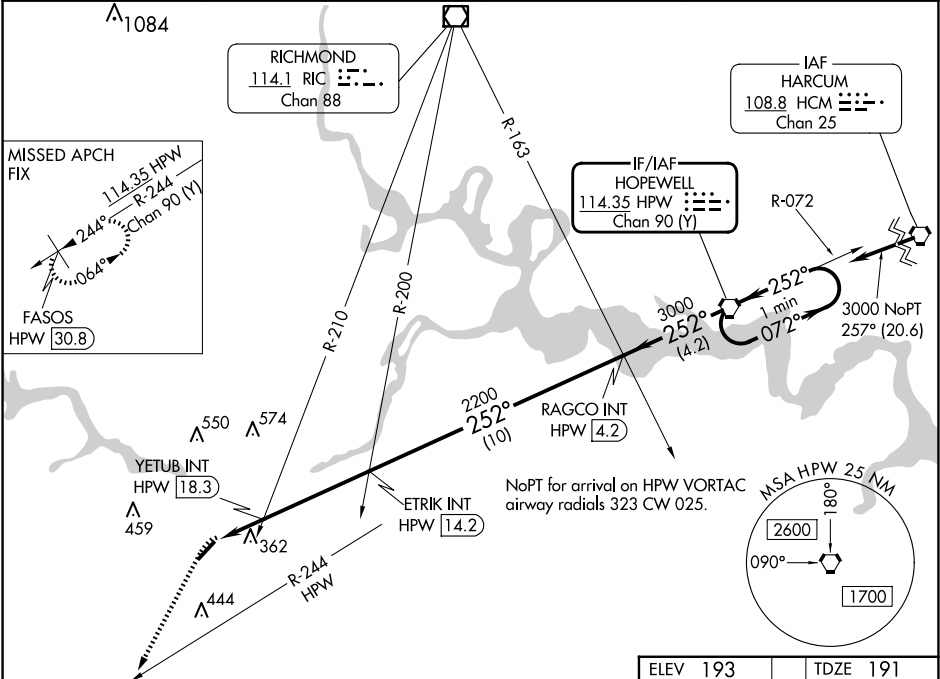

2000
hdg 214°

HPW R-244 FASOS HPW (30.8)

*780 when using Richmond Executive-Chesterfield County altimeter setting.

One Minute Holding Pattern

RAGCO INT HPW (4.2) HPW VORTAC

YETUB INT HPW (18.3) ETRIK INT HPW (14.2)

HPW (20.2) 3.06° TCH 40

2200 252° 3000 072°

1.9 NM 4.2 NM 10 NM 4.2 NM

CATEGORY	A	B	C	D
S-23	740-1 549 (600-1)		740-1 5/8 549 (600-1 1/8)	NA
CIRCLING	740-1 547 (600-1)		760-1 5/8 567 (600-1 1/8)	NA
YETUB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-23	620-1 429 (500-1)		620-1 1/4 429 (500-1 1/4)	NA
CIRCLING	680-1 487 (500-1)		760-1 1/2 567 (600-1 1/2)	NA

ELEV 193 TDZE 191

MIRL Rwy 5-23 0
REIL Rwy 23 0

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

NE-3, 04 SEP 2025 to 02 OCT 2025

NE-3, 04 SEP 2025 to 02 OCT 2025