

DENTON, TEXAS



AL-5866 (FAA)

25219

WAAS CH 82143 W18A	APP CRS 177°	Rwy Ldg TDZE Apt Elev	18L 6502 642 643	18R 5003 643 643
--	------------------------	-----------------------------	--	--

RNAV (GPS) RWY 18L
DENTON ENTERPRISE (D'TO)

RNP APCH-GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM, and LNAV Cats C and D to 1 SM.		MALSR 	MISSED APPROACH: Climb to 1900 then climbing right turn to 4000 direct GREGS and hold.	
ATIS 119.325	LONE STAR APP CON 118.1 306.95	DENTON TOWER ★ 119.95 (CTAF) 0		GND CON 123.95
				CLNC DEL 123.95

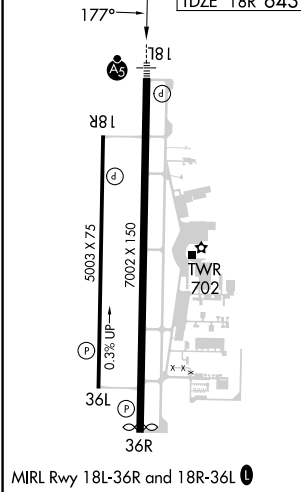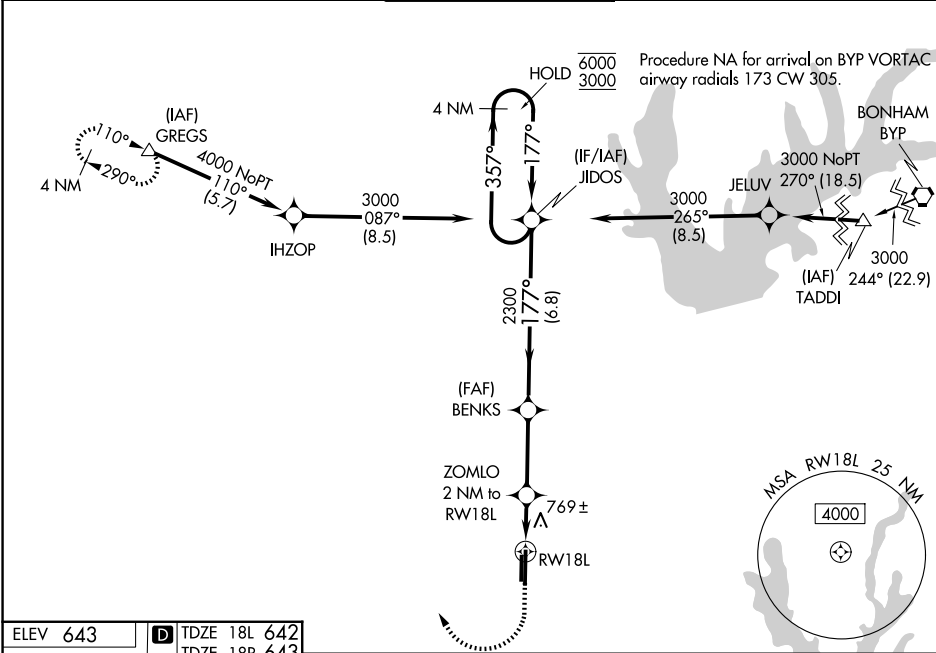

ELEV 643		D TDZE 18L 642		TDZE 18R 643	
177°		1900		4000	
18L		GREGS		△	
18R		BENKS		JIDOS	
5003 X 75		ZOMLO 2 NM to RW18L		4 NM Holding Pattern	
7002 X 150		1 NM to RW18L		357° → 6000	
0.3% UP		1320		← 177° 3000	
36L		1 NM		GP 3.00°	
36R		1 NM		TCH 50	
		3.1 NM			
		6.8 NM			
CATEGORY		A		B	
LPV DA		842-½		200 (200-½)	
LNAV/VNAV DA		950-½		308 (400-½)	
LNAV MDA		1020-½ 378 (400-½)		1020-¾ 378 (400-¾)	
SIDESTEP 18R		1100-1 457 (500-1)		1100-1½ 457 (500-2)	
CIRCLING		1100-1 457 (500-1)		1380-2 737 (800-2)	
		1260-1 617 (700-1)		1380-2¼ 737 (800-2¼)	

DENTON, TEXAS
Orig-A 22FEB24

33°12'N-97°12' W

DENTON ENTERPRISE (D'TO)
RNAV (GPS) RWY 18L

SC-2, 04 SEP 2025 to 02 OCT 2025

SC-2, 04 SEP 2025 to 02 OCT 2025