

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>86524</b><br><b>W27A</b> | APP CRS<br><b>268°</b> | Rwy Ldg <b>5000</b><br>TDZE <b>2925</b><br>Apt Elev <b>2933</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

# RNAV (GPS) RWY 27

## GARRETT COUNTY (2G4)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using MGW altimeter setting. When local altimeter setting not received, use MGW altimeter setting and increase LPV DA to 3425 feet and all visibilities % SM. Increase LNAV/VNAV DA to 3475 feet and all visibilities % SM; increase all MDAs 300 feet and LNAV visibility Cat C % SM, and Circling visibility Cat C 1 SM.



**MISSED APPROACH:**  
Climb 5700 direct  
PINIC and hold.

AWOS-3  
120.125

CLARKSBURG APP CON ★  
119.425 284.65

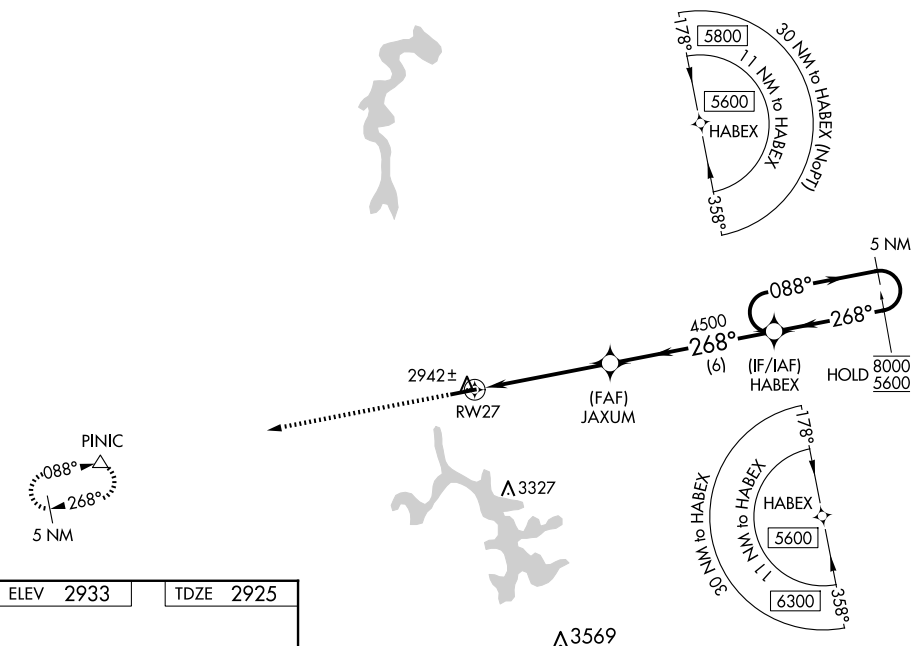UNICOM  
123.0 (CTAF) **L**

|      |      |  |      |      |
|------|------|--|------|------|
| ELEV | 2933 |  | TDZE | 2925 |
|------|------|--|------|------|

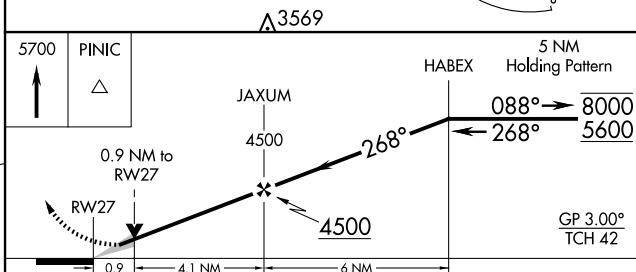

| CATEGORY                                                                                     |     | A                     | B                     | C                       | D  |
|----------------------------------------------------------------------------------------------|-----|-----------------------|-----------------------|-------------------------|----|
| LPV                                                                                          | DA  | 3125-1                | 200 (200-1)           |                         | NA |
| LNAV/<br>VNAV                                                                                | DA  | 3175-1                | 250 (300-1)           |                         | NA |
| LNAV                                                                                         | MDA | 3200-1                | 275 (300-1)           |                         | NA |
|  CIRCLING |     | 3380-1<br>447 (500-1) | 3400-1<br>467 (500-1) | 3500-1½<br>567 (600-1½) | NA |