

VORTAC LAL	APP CRS	Rwy Idg	3950
116.0	275°	TDZE	154
Chan 107		Apt Elev	154

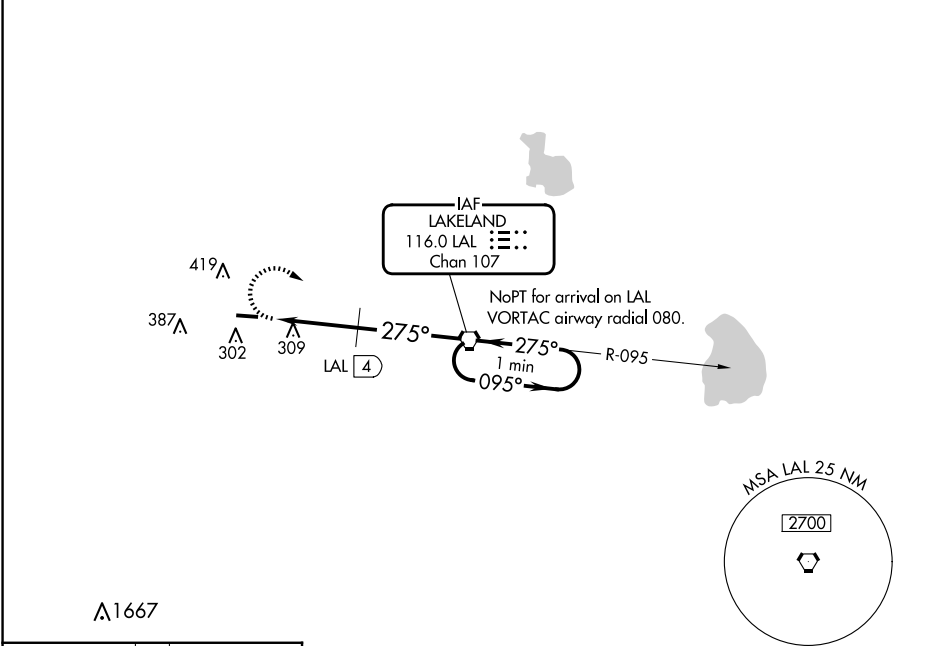
VOR RWY 28
PLANT CITY (PCM)

NA

When local altimeter setting not received, use Lakeland altimeter setting and increase all MDA 20 feet. Straight-in and Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 2000 direct LAL VORTAC and hold.

AWOS-3 120.025	TAMPA APP CON 120.65 290.3	CLNC DEL 121.725 (GCO)	UNICOM 123.05 (CTAF) 0
-------------------	-------------------------------	---------------------------	----------------------------------



ELEV 154


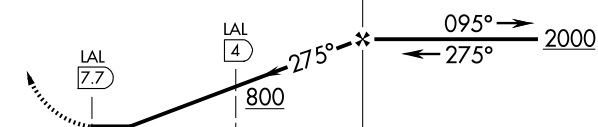
TDZE 154

MRL Rwy 10-28 **0**

REIL Rws 10 and 28 **0**

FAF to MAP 7.7 NM

Knots	60	90	120	150	180
Min:Sec	7:42	5:08	3:51	3:05	2:34

		LAL VORTAC		One Minute Holding Pattern		
		LAL 7.7		LAL 4		
		3.7 NM		4 NM		
CATEGORY	A		B		C	D
S-28	800-1		646 (700-1)		NA	
 CIRCLING	800-1		646 (700-1)		NA	
DME MINIMUMS						
S-28	600-1		446 (500-1)		NA	
 CIRCLING	700-1		800-1		NA	
		546 (600-1)		646 (700-1)		