

WAAS
CH **69314**
W23A

APP CRS
227°

Rwy ldg
TDZE
Apt Elev
5000
8
8

RNAV (GPS) RWY 23
NAPLES MUNI (APF')

RNP APCH.


▼

▲

Rwy 23 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below 5°C or above 54°C.

MISSED APPROACH: Climb to 2100 direct VIZAF and hold.

ATIS 134.225	FORT MYERS APP CON★ 124.125 371.85	NAPLES TOWER★ 128.5 (CTAF) 0	GND CON 121.6	CLNC DEL 118.0	CLNC DEL 124.125 (When twr closed)
------------------------	--	--	-------------------------	--------------------------	---

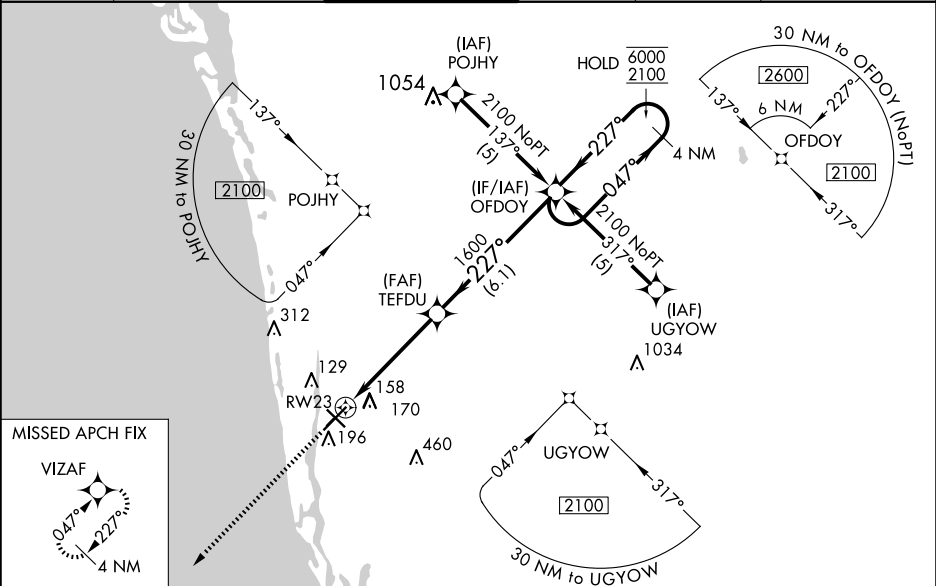

ELEV 8

D

TDZE 8

2100

VIZAF

TEFDU

OFDOY

*LNAV only.

*1.2 NM to RW23

1.2 NM

3.6 NM

6.1 NM

4 NM Holding Pattern

GP 3.00°
TCH 44

CATEGORY	A	B	C	D
LPV DA		313-7⁄8	305 (400-7⁄8)	
LNAV/VNAV DA		461-13⁄8	453 (500-13⁄8)	
LNAV MDA	440-1	432 (500-1)	440-1¼	432 (500-1¼)
CIRCLING	580-1	572 (600-1)	680-2 672 (700-2)	820-2¾ 812 (900-2¾)