

LOC/DME I-VYIN 111.9 Chan 56	APP CRS 176°	Rwy Ldg TDZE 607 Apt Elev 607	18R 13400	18L 13401
ILS or LOC RWY 18R DALLAS-FORT WORTH INTL (DFW)				


⚠ Inop table does not apply to Sidestep 18L Cats A and B. DME or RADAR required. Simultaneous approach authorized with Rwy 17 L/C/R. For inop ALSF/MALSR, increase S-LOC 18R Cat C/D and Sidestep 18L Cat C visibility to 1¾ mile.

Rwy 18R
ALSF-2
A


Rwy 18L
MALSR
AS

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 250° and FUZ VORTAC R-222 to LIKES INT/FUZ VORTAC 27 DME and hold.

D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 118.425	DFW TOWER 126.55 127.5 124.15 134.9	EAST WEST	GND CON 121.65 121.8 121.85 WEST	CLNC DEL 128.25	CPDLC
--	-------------------------------------	---	--------------	--	---------------------------	-------

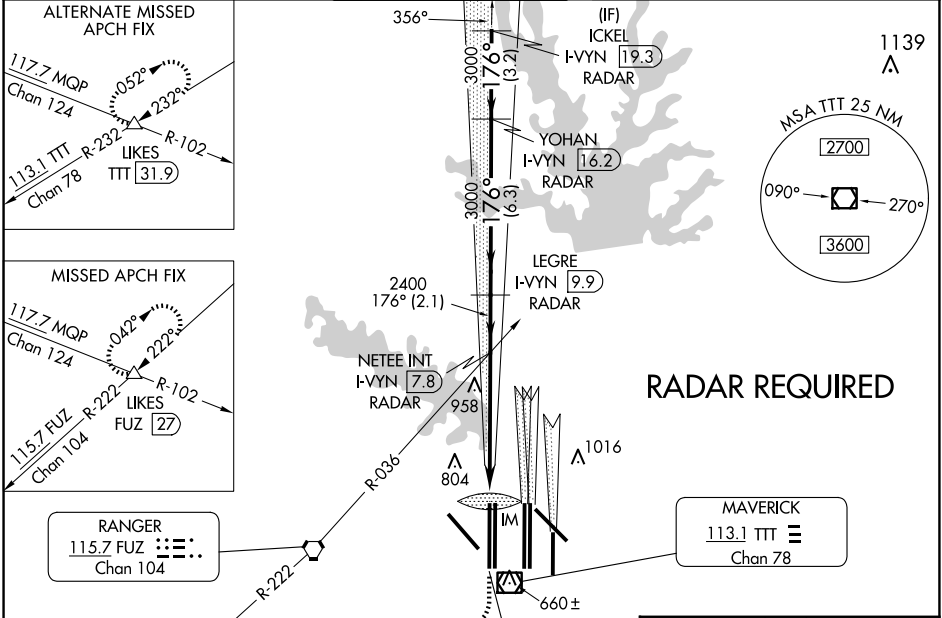

ELEV 607	D	TDZE 18R 607 TDZE 18L 602
-----------------	----------	--

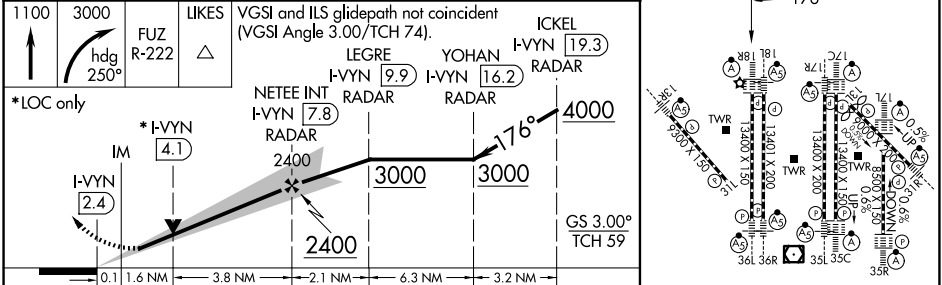

CATEGORY	A	B	C	D
S-ILS 18R	807/18 200 (200-½)			
S-LOC 18R	1220/24	613 (700-½)	1220-1¾	613 (700-1¾)
SIDESTEP 18L	1220/50	618 (700-1)	1220-1¾	1220-1½
		618 (700-1¾)	618 (700-1½)	

HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50