

VORTAC RQZ

112.2

APP CRS

313°

Rwy Ldg

5010

TDZE

665

Chan

59

Apt Elev

689

VOR RWY 34

ABERNATHY FLD (GZS)

DME required.


▼

▲ NA

Circling Rwy 16 NA at night. Rwy 34 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use MDQ altimeter setting and increase all MDA 100 feet and increase S-34 Cats A/B visibility $\frac{1}{4}$ SM and Cats C/D visibility $\frac{1}{2}$ SM; increase Circling Cat B visibility $\frac{1}{4}$ SM and Cat C visibility $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 on RQZ VORTAC R-313 to ARDER/RQZ 17.2 DME and hold.

AWOS-3 118.275	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF)
-------------------	---------------------------------	------------------------

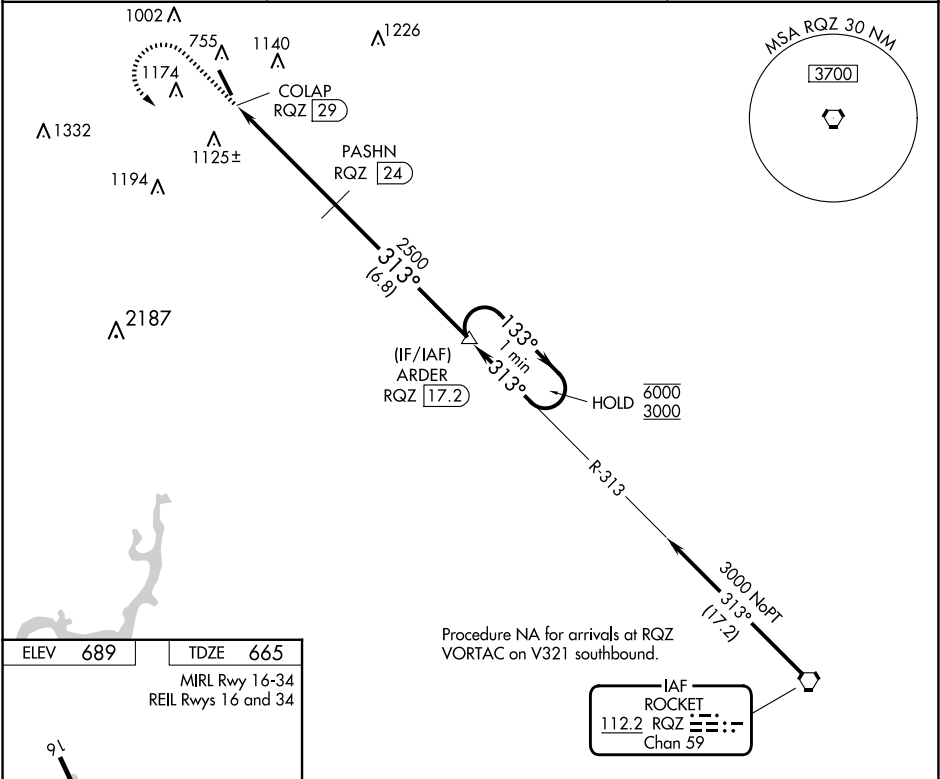

2000	3000	RQZ R-313	ARDER Δ	ARDER RQZ [17.2]	One Minute Holding Pattern
PASHN RQZ [24] COLAP RQZ [29] 3.11° TCH 40 5 NM 6.8 NM 133° 313° 2500 6000 3000 VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 28).					
CATEGORY	A	B	C	D	
S-34	1520-1 855 (900-1)	1520-1 $\frac{1}{4}$ 855 (900-1 $\frac{1}{4}$)	1520-2 $\frac{1}{2}$	855 (900-2 $\frac{1}{2}$)	
CIRCLING	1520-1 $\frac{1}{4}$	831 (900-1 $\frac{1}{4}$)	1520-2 $\frac{1}{2}$ 831 (900-2 $\frac{1}{2}$)	1640-3 951 (1000-3)	

SE-1, 04 SEP 2025 to 02 OCT 2025

SE-1, 04 SEP 2025 to 02 OCT 2025